


MB885V



Features

- Supports Pentium® 4 / Celeron® D processors
Up to 3.6GHz, 533MHz/800MHz FSB
- 2x DDR DIMM, Max. 2GB
- Dual PCI-E Gigabit LAN
- Integrated Intel® 915GV VGA, CRT support
- 4x SATA, 6x USB 2.0, 4x COM, Watchdog timer
- 1x PCI-E(x1), 5x PCI slots

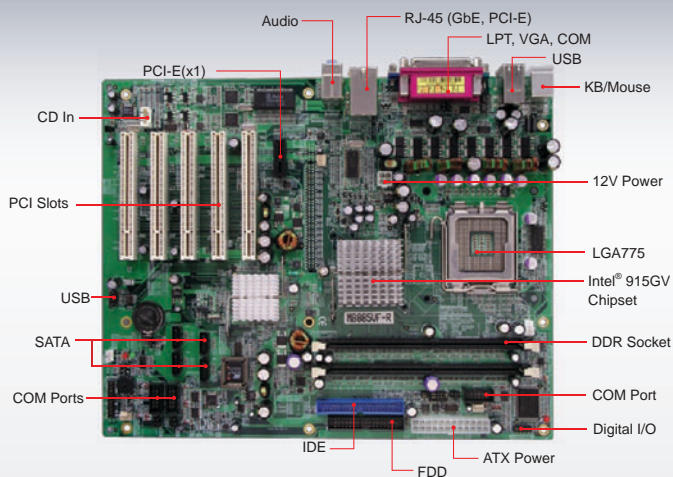

System

CPU	LGA775 for Pentium® 4 / Celeron® D Up to 3.6GHz
System Memory	2x DDR DIMM, Max. 2GB
System Chipset	Intel® 915GV + ICH6, 533MHz/800MHz FSB
BIOS	Award
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slot	5x PCI, 1x PCI-E(x1)

Graphics

VGA Controller	Intel® 915GV integrated Graphics Media Accelerator 900 (GMA 900 graphics) for CRT
VGA Memory	Supports DVMT 3.0; Max. shared memory - 128MB
Display Interface	Supports CRT

LAN

Controller	1x or 2x Marvell PCI-E Gigabit LAN
Connector	RJ-45 on board

Multi I/O

I/O Chipset	ICH6, Winbond 83627HF, Fintek F81216 1x IDE, 1x FDD, 1x KB, 1x Mouse 4x RS-232, 4x SATA, 1x LPT
USB	4 ports on board Pin header for 2 ports (USB 2.0)
Audio	Built-in audio + AC97 codec
Others	IrDA, Digital I/O (4-in/4-out)

Mechanical and Environmental

Dimensions	305mm x 244mm (12" x 9.6")
Max. Power Requirement	Pentium® 4 3.6GHz w/ 1GB DDR333 +5V: 6.78A +12V: 9.90A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

MB885V-R	LGA775 915GV ATX motherboard w/ VGA and Gigabit LAN
MB885VF-R	LGA775 915GV ATX motherboard w/ VGA and dual Gigabit LAN

Remarks:

* Specifications are subject to change without prior notice.