



Specifications

SoC	DM&P(SiS) Vortex86™ System-on-Chip 133MHz Real Time Clock with Lithium Battery Backup
Bus	PC/104 standard compliant 32-bit x-PCI interface, compatible with PCI Rev.2.2, PC 98/99
BIOS	AMI BIOS
System Memory	Onboard 64MB SDRAM
Watchdog Timer	Software programmable from 4ms to 1 hour
VGA	AGP Rev.2.0 compliant Shared system memory up to 64MB (Default 8 MB) Support resolution up to 1,280x1,024 true colors VGA and Mono/STN/DSTN/TFT Flat Panel interface support
Flash Disk Support	MSTI EmbedDisk Module (16MB and above) PQI DiskOnModule (16MB and above)
I/O Interface	Enhanced IDE port x1 FDD port x1 RS-232 port x1 RS-232/485 port x1 Parallel port x1 USB port x2 (Ver 1.1) 12-bit GPIO port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 34-pin box header for FDD x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin header for 12-bit GPIO x1 2.0mm 10-pin box header for RS-232 x2 2.0mm 10-pin box header for USB x1 2.0mm 10-pin box header for VGA x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 2-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1
Power Requirement	Single Voltage +5V @750mA
Weight	112g
Board Size	90 X 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C

Flexible DC Power Connector interconnect to PC/104

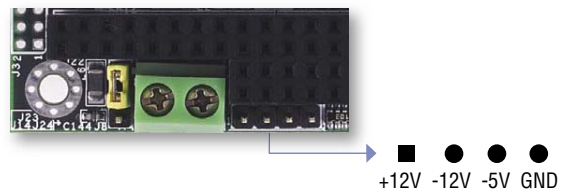

12-bit GPIO Port Support



Packing List

- Vortex86-6072 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.Q) x1
 - FDD (2.Q) x1
 - PRINT (2.Q) x1
 - RS-232 (2.Q) x2
 - VGA (2.Q) x1
 - USB (2.Q) x1
 - GPIO (2.Q) x1
 - PS2 KB White x1
 - PS2 KB (TEST) Black x1
- Screw Kit x1

Ordering information:

- Vortex86-6072** Vortex86 PC/104 CPU Module with 64MB
- Vortex86-6072-128MB** Vortex86 PC/104 CPU Module with 128MB
- Vortex86-6072-32MB** Vortex86 PC/104 CPU Module with 32MB
- LCD-064/084/104-SET** 6.4"/8.4"/10.4" LCD Kit
- VOX-064/-TS** 6.4" Open Frame Panel PC/with Touch Screen (optional)