

INPUT CHARACTERISTICS:**R2W-6460P**

- VOLTAGE: 90 ~ 264 VAC FULL RANGE
- FREQUENCY : 47 ~ 63 Hz
- INPUT CURRENT: 8.0 / 4.0 A FOR 115 / 230 VAC
- INRUSH CURRENT: 60A / 80A MAX. FOR 115 / 230 VAC PER POWER MODULE

OUTPUT CHARACTERISTICS:

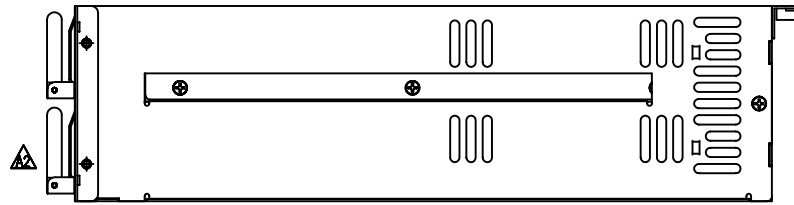
OUTPUT VOLTAGE	OUTPUT CURRENT			REGULATION		OUTPUT
	MIN.[A]	MAX.[A]	PEAK(A)	LOAD	LINE	RIPPLE & NOISE MAX. [P-P]
5V	2.0	30		± 5%	± 1%	50mV
12V	2	32		± 5%	± 1%	120mV
-5V	0.05	0.7		+5/-10%	± 1%	120mV
-12V	0.05	0.7		+5/-10%	± 1%	120mV
3.3V	1.0	24		± 5%	± 1%	50mV
+5VSB	0.1	2.0		+ 6/-5%	± 1%	50mV

REMARKS: TOTAL CURRENT OF +5V AND + 3.3V NOT EXCEED 43 A;
total output power not exceed 460w

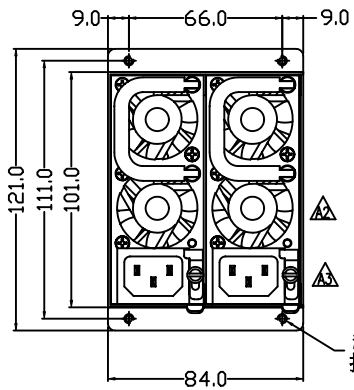
- TEMPERATURE RANGE : OPERATING 0°C --- 40°C, STORAGE -20°C --- 70°C
- HOLD UP TIME: 16 ms MINIMUM AT FULL LOAD & 90 VAC INPUT VOLTAGE
- DIELECTRIC WITHSTAND: INPUT / OUTPUT 1500 VAC FOR 1 MINUTE
INPUT TO FRAME GROUND 1500 VAC FOR 1 MINUTE
- EFFICIENCY: 68% TYPICAL, AT FULL LOAD 115V
- POWER GOOD SIGNAL: ON DELAY 100 ms TO 500 ms, OFF DELAY 1 ms
- OVER LOAD PROTECTION: 110 ~ 160% MAX.
OVER VOLTAGE PROTECTION:
+5V → 5.7V ~ 6.5V, 3.3V → 3.9 ~ 4.3V, 12V → 13.3 ~ 14.3V
- OVER CURRENT PROTECTION
- EMI NOISE FILTER: FCC CLASS B, CISPR22 CLASS B
- SAFETY: UL 1950, CSA 22.2 NO/ 950, TÜV IEC 950
- REMOTE ON / OFF CONTROL
- FAULTY ALARM METHODS : LED, BUZZER, TTL SIGNAL
- HOT-SWAPPABLE / HOT-PLUGGABLE REDUNDANCY FUNCTION
- REMOTE SENSING DESIGN
- ISOLATION: BUILT-IN IN THE POWER MODULE
- MEET IEC-1000-3-2 CLASS D (ACTIVE PFC)
- DIMENSION: 84(H) X 101(W) X 300 (D) mm
- COOLING : TWO 38x38x28 mm DC FANS (MODULE)
- AC INLET IN EACH MODULE

修訂 REVISIONS		
版次 REV.	記錄 DESCRIPTION	日期 DATE
A2	增加風扇網凸出高度	AUG-12-2002
A3	故定片設計變更	DEC-20-2002

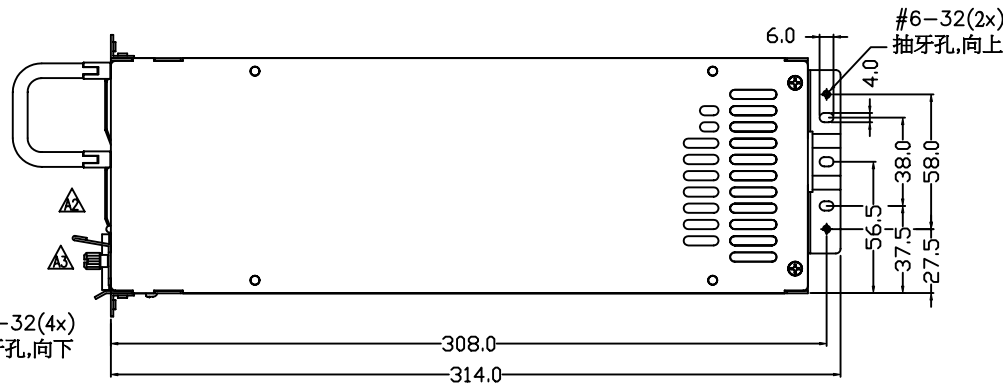

A



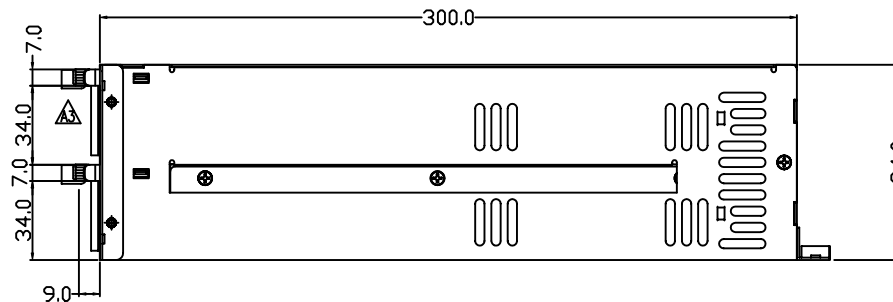
B

#6-32(4x)
抽牙孔,向下

C

#6-32(2x)
抽牙孔,向上

D



E

TOLERANCES:±0.5mm

容許公差:
TOLERANCES:
.XXX ±.025
.XX ±.100
.X ±.250

材料規格:
MATERIAL:核准者:
APPROVE BY:日期:
DATE:

投影法:
PROJECTION:
第三角法

審核者:
CHECK BY:
繪圖者:
DRAW BY:

日期:
DATE:
DEC-20-2002



新巨企業股份有限公司
ZIPPY TECHNOLOGY CORP.
POWER DIVISION

品名:
MODEL NO: R2W 外觀尺寸圖

料號:
PART NO:

圖號: R2W0MA00 檔號: R2W0MA00
DRAW NO: FILE NO:

單位: mm 版次: A3 規格: A1 編號: OF
UNITS: REV. NO: SPEC.: SHEET: