

15" Industrial Sun Readable Panel PC

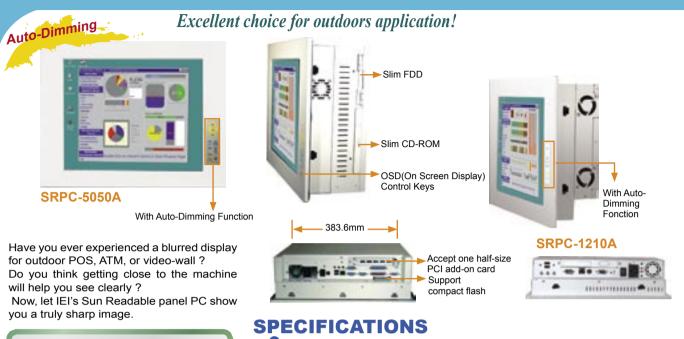


# **Main Features**

- Equipped with Sun Readable LCD
- Aluminum made front panel, meets IP65 standard.
- Support Auto-Dimming function, display brightness will be adjusted to lightsource automatically.

## Dimensions:SRPC-5050A



## **Dimensions:SRPC-1210A**



- Aluminum front panel, meets IP-65 stantard
- Supports Auto-Dimming function
- SRPC-5050A
- 15" high brightness TFT LCD - Resolution: 1024 x 768
- Brightness: 1750cd/m<sup>2</sup>
- LCD MTBF: 50,000 hours - Backlight MTBF: 25,000 hours
- Drive Bays:

SRPC-5050A	SRPC-1210
1 x Slim FDD 1 x Slim CD-ROM 1×2.5" HDD	1×2.5" HDD

- Accept one half-size PCI/ISA add-on card (SRPC-5050A)
- SRPC-5050A Equipped with POS-370 or POS-566 POS-EDEN-400 full function SBC

SRPC-1210A

- 12.1" high brightness TFT LCD

- Backlight MTBF: 25,000 hours

- Resolution: 800 x 600

- Brightness: 1308 cd/m<sup>2</sup>

- LCD MTBF: 50,000 hours

- SRPC-1210A equipped with WAFER-5822 Embedded board ♦ Operating temperature: 0~40°C
- Standard Power Supply:
- SRPC-5050A: UPF200-AA 200W with PFC Industrial ATX Power Supply SRPC-1210A: ACE-916AP Industrial AT power supply with PFC function ◆ Vibration: 5-17Hz, 0.1" double amplitude displacement
- 17-640Hz, 1.5G acceleration peak to peak
- Shock: 10G acceleration peak to peak (11ms)
- ◆ Color: White(PANTONE 413C)

# ORDERING INFORMATION

Model	SBC	Power Suppy	Touch Screen
SRPC-5050AW-AL	POS-370N POS-370R POS-EDEN-400-64MB POS-566	UPF200-AA	T-R151B T-C151
SRPC-1210AW- AL	WAFER-5822 / 128	ACE-916AP	T-R (T-R121B) T-C (T-C121)

Optional: RK-150: Rack Mounting Kit for SRPC-5050A ARM-31: Loading capacity from 7 to 14kgs

Note: For other colors of front panel and chassis, please contact supplier

0