


# G4V621-B rev. A+

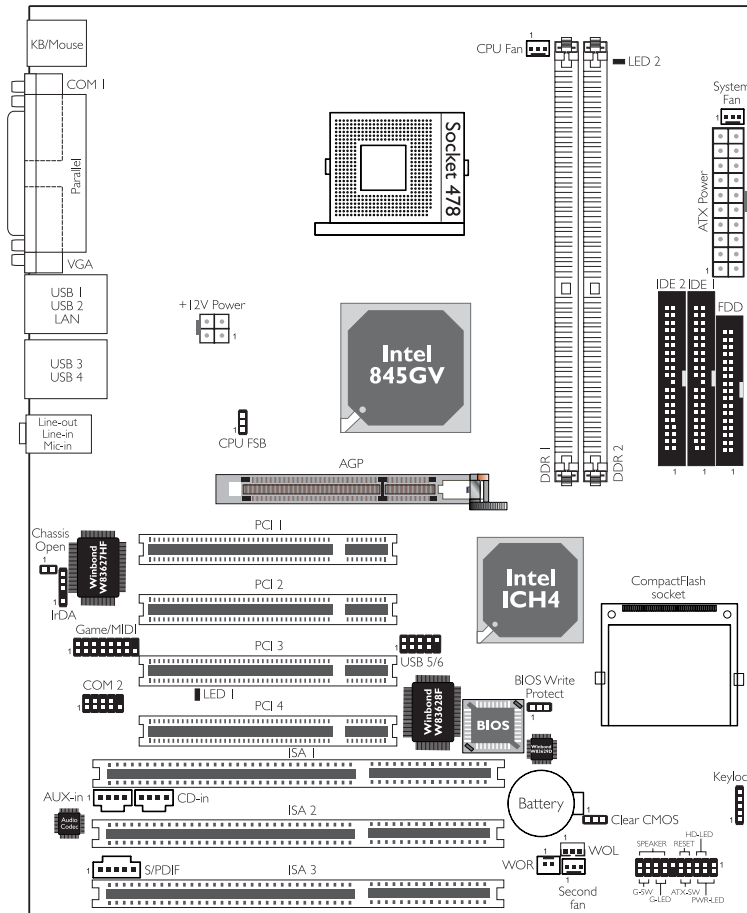

**CPU FSB Select (JP1)** 1-2 On: Auto (default); 2-3 On: 100MHz (forced FSB speed)

**BIOS Write Protect (JP2)** 1-2 On: Write Protect Disabled; 2-3 On: BIOS Protect Enabled (default)

**Clear CMOS Data (JP3)** 1-2 On: Normal (default); 2-3 On: Clear CMOS Data

**Standby LEDs:** The DIMM Standby Power LED (LED 2) will turn red when the system's power is on or when it is in the Suspend state (Power On Suspend or Suspend to RAM). It will not light when the system is in the Soft-Off state. The PCI Standby Power LED (LED 1) will turn red when the system is in the power-on, Soft-Off or Suspend (Power On Suspend or Suspend to RAM) state. Lighted LEDs serve as a reminder that you must power-off the system then turn off the power supply's switch or unplug the power cord prior to installing any memory modules or add-in cards.

Wake Up Events	5VSB Power Source
Wake-On-Keyboard, Wake-On-LAN and Wake-On-Ring	≥ 720mA
Suspend to RAM	≥ 1A
Wake-On-USB KB for 2 USB ports	≥ 1.5A
Wake-On-USB KB for 3 or more USB ports	≥ 2A

934-G4V623-500  
A83001430