


# ENERGIZER EN6

**1.5V**

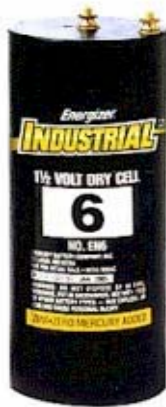


## Specifications

**NOT INTENDED FOR RETAIL TRADE**


<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	ANSI-906AC, IEC-LR40
<b>Nominal Voltage:</b>	1.5 volts
<b>Operating Temp:</b>	-18°C to 55°C (0°F to 130°F)
<b>Typical Weight:</b>	482 grams (17.1 oz.)
<b>Typical Volume:</b>	594 cubic centimeters (36.2 cubic inch)
<b>Jacket:</b>	Plastic
<b>Cells:</b>	Two 3-361 in parallel
<b>Terminal:</b>	Screw Post

## Industry Standard Dimensions


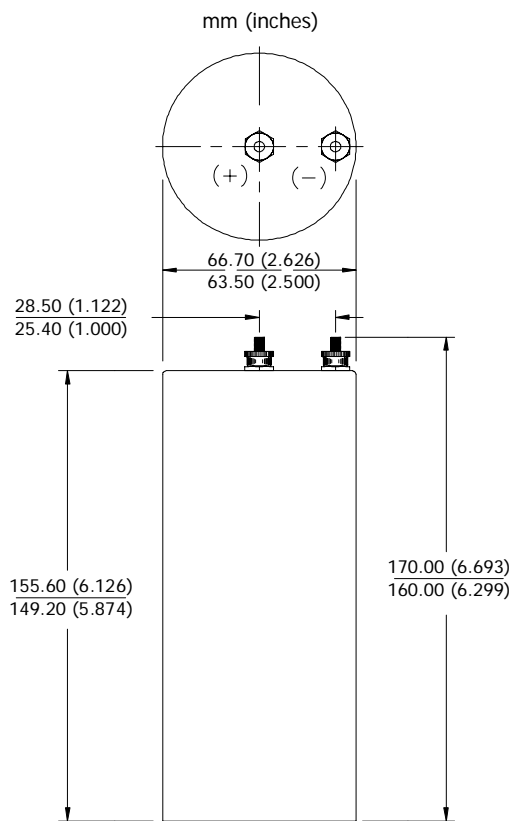


## Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

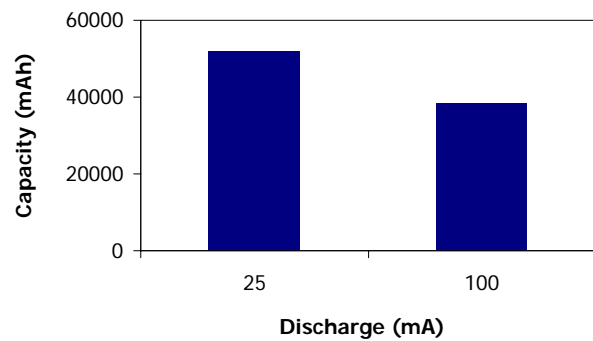

## Simulated Application Tests (21°C)

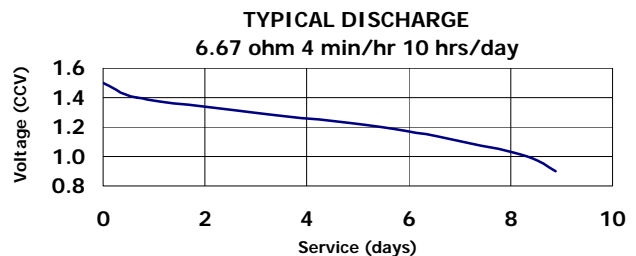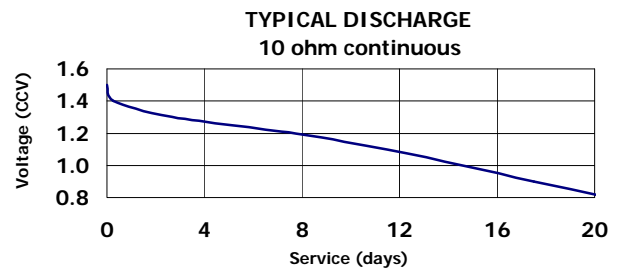

### Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.