

### Features

- 21.5" Full HD (1920x 1080) Fanless TFT LCD Display
- Easy-To-Clean: Multi-Touch Window Design (Two-Point)
- Intel® Core™ i7/i5/P4500 Processor
- IP-65 Front Bezel & IPx1 Back Chassis
- Anti-Scratch Surface (7H Hardness)
- Smart Card Reader/ RF ID/ MSR/ Skype Phone/ Camera Support




### Specifications

System	
Processor	Intel® Core™ i7/i5/P4500 Processor, Core™ i7-620M, Core™ i5-520M, P4500
Memory	DDR3 SODIMM x 1, up to 4 GB
LCD/CRT Controller	Integrated graphics in Intel® QM57
Ethernet	10/100/1000Base-TX, RJ-45 x 2
I/O Port	RS-232 x 1, USB2.0 x 6 (2 on side; 4 on rear), Line-out x 1, VGA x 1
Storage Disk Drive	2.5" SATA Hard Disk Drive/ CompactFlash™ Slot (Internal)
Expansion Slot	Mini card x 1
OS support	Windows® XP (T/S: Single point), Linux Fedora (T/S: Single point), Windows® 7 (T/S: Multi-point)
Mechanical	
Construction	IP-65/ NEMA4 for plastic front bezel, IPx1 for plastic chassis
Mounting	VESA 100
Dimension	21.57" x 13.7" x 2.48" (548mm x 348.1mm x 63mm)
Carton Dimension	—
Gross Weight	—
Net Weight	—
Environmental	
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	10%~95% @ 40°C; non-condensing
Vibration	1 g rms/ 5~500Hz/ Random operation (HDD)
Shock	20 G peak acceleration (11 msec. Duration)
EMC	CE/FCC Class A
Power Supply	
DC input 70W	DC 12V, with AC power adapter with lock in package
LCD	
Display type	21.5" TFT-LCD, LED
Max Resolution	1920x 1080
Max. Colors	16.7M colors (6/8-bit for R,G,B)
Luminance	250 cd/m <sup>2</sup>
Viewing Angle	170°(H), 160°(V)
Back Light	LED
Back Light MTBF (hours)	50,000
Touchscreen	
Type	Projected Capacitive Multi-Touch (Windows® 7)
Light Transmission	90%

# ACP-5215

## Dimension

Unit: mm

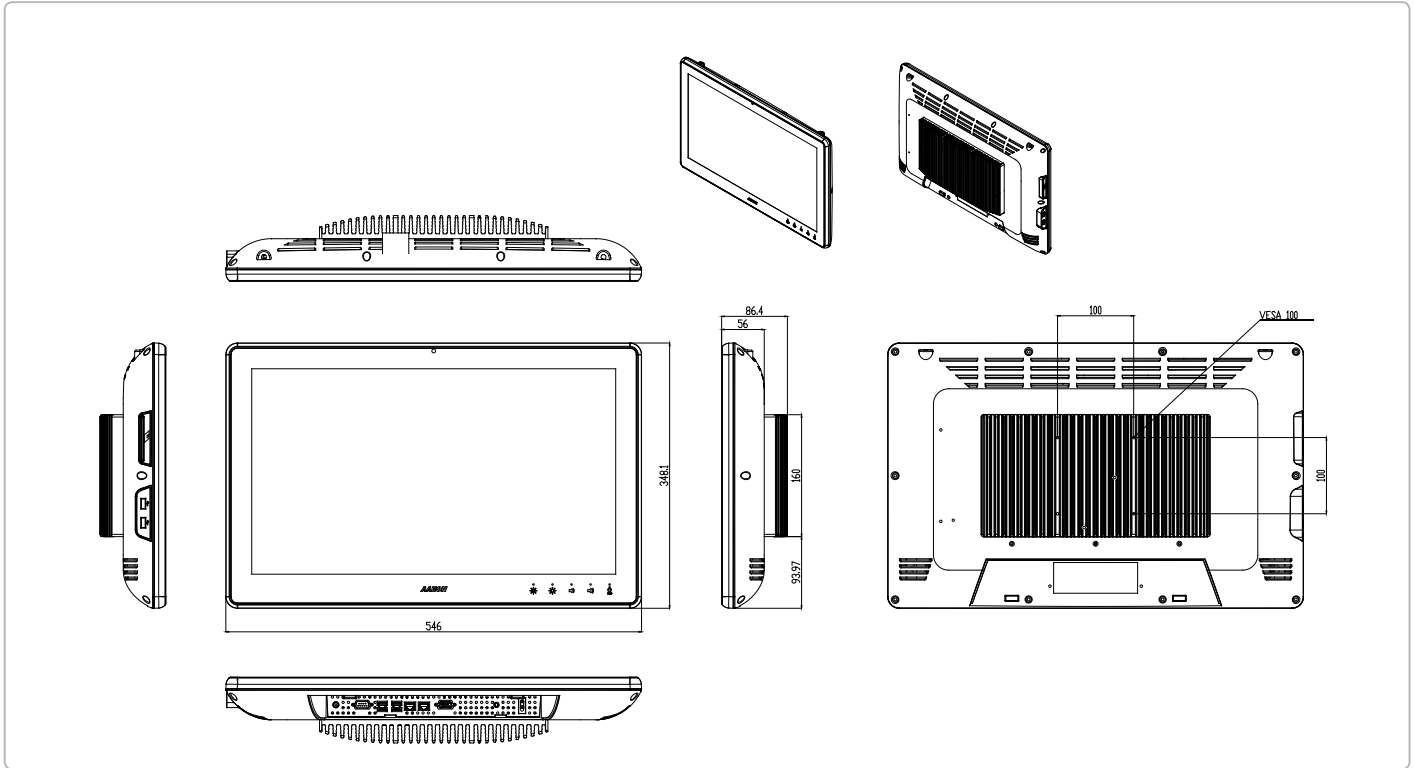

## Ordering Information

- **ACP-5215HTT-A1-1010**  
21.5" Fanless Multi-Touch Panel Computer with 2GB DDRIII and i7-620M
- **ACP-5215HTT-A2-1010**  
21.5" Fanless Multi-Touch Panel Computer with 2GB DDRIII and i5-520M
- **ACP-5215HTT-A3-1010**  
21.5" Fanless Multi-Touch Panel Computer with 2GB DDRIII and P4500

## Optional Accessories

- **1702031802**  
Power Cord (US Type)
- **1702031803**  
Power Cord (European Type)
- **170203180E**  
Power Cord (Japanese Type)
- **9761518200**  
Smart Card Reader
- **9761518201**  
Camera
- **9761518207**  
RF ID
- **9761518204 + AP-OT97896665D**  
Skype Phone and Mounting Kit
- **9761518206**  
MSR + Mounting Kit
- **9761518205**  
Scanner (2D) + Mounting Kit
- **9761518202**  
WiFi Antenna
- **9761115200**  
WiFi Module, IEEE 802.11 b/g + Bluetooth™
- **P005182010**  
Plastic Cover For Cables
- **AP-OT9789LA1000**  
Desktop Stand