


# PCI (Low Profile)

Serial Communications



## BlueStorm/LP

### Features

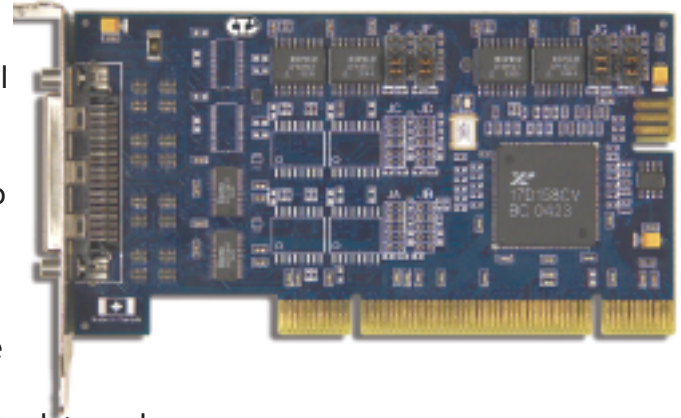- Two, four or eight asynchronous serial ports in various electrical interface configurations
- Supports full duplex (4 wire) with RTS/CTS flow control, half duplex (2 wire) with auto TxD echo cancellation and multi-drop (4 wire) full duplex communication modes in RS-422/485
- Maximum data speeds of 921.6 Kbps (RS-232) and 1.843 Mbps (RS-422/485)
- Optional multi-strike surge suppression; IEC 1000-4 compatible on all signals, all ports
- Each port can be configured independently for baud rate, parity, data and stop bits
- Lifetime Warranty



### Specifications

<b>Number of ports</b>	2, 4 or 8
<b>Electrical Interface</b>	2 port models: 2 ports RS-232; 2 ports RS-422/485 4 port models: 4 ports RS-232; 4 ports RS-422/485; 2+2 ports RS-232+RS-422/485 8 port models: 8 ports RS-232; 8 ports RS-422/485; 4+4 ports RS/232+RS/422/485
<b>Connectors</b>	DB-9 male fan out cable (custom cable solutions also available)
<b>Control Signals</b>	RS-232: TxD, RxD, RTS, CTS, RI, DTR, DSR, DCD and Signal Ground (SG) RS-422/485: TxD <sub>+/+</sub> , RxD <sub>+/+</sub> , RTS <sub>+/+</sub> , CTS <sub>+/+</sub> and Signal Return (SR)
<b>Baud Rates</b>	RS-232: 50 bps to 921.6 Kbps RS-422/485: 50 bps to 1.843 Mbps (custom baud rates also available)
<b>Interrupts</b>	Assigned by Plug and Play resources
<b>Memory Addresses</b>	Assigned by Plug and Play resources
<b>UART Type</b>	Dual, quad or octal Exar PCI UARTs with 64 byte transmit and receive FIFO buffers for each port
<b>Dimensions</b>	Low profile form factor. Height: 6.44 cm/2.54" (PCB only)      Length: 12.72 cm/5.01" (includes connector) Width: 1.50 cm/0.59"      Weight: 0.06 kg/2.12 oz
<b>Power Requirements</b>	+3.3 VDC (all 2 port models) +5 VDC (2, 4 and 8 port with RS-422/485 only) +5 VDC, ±12 VDC (2 and 4 port RS-232), +12VDC (8 and 4 + 4 port RS-232)
<b>Environmental</b>	Operating Temperature: 0° to 70° C  Storage Temperature: -55° to 125° C Humidity: 95% non-condensing
<b>Bus</b>	Universal PCI: 3.3V or 5V PCI bus
<b>Software Compatibility</b>	Windows 2000/XP and NT, QNX, Linux 
<b>Surge Suppression</b>	IEC 1000-4 compatible on all signals, all ports (optional)
<b>System Requirements</b>	One 3.3V or 5V PCI slot. (The BlueStorm/LP can be purchased with low profile and/or standard height chassis brackets)
<b>Regulatory Approvals</b>	FCC Class A  EN50082-2 ICES-003 Class A      EN 55022 Class A EN 55024

The low profile BlueStorm/LP is designed on the small MD1 form factor, using high performance PCI UARTs. The UARTs offer 64 bytes of transmit and receive FIFO buffers, reducing the frequency of interrupts to the main CPU, thus improving overall system performance. The UART offers full functionality in a single chip, meaning fewer components on the board and therefore higher reliability.

The BlueStorm/LP supports three RS-422/485 modes: full duplex, half duplex and multi-drop slave for four wire, full duplex communications of multi-drop devices.

All ports have full modem control, along with independent configuration options for parity, baud rate, data and stop bits.

All Connect Tech products are covered by a lifetime warranty and no-charge technical support.



**Connect Tech Inc.**  
Industrial Strength Communications

42 Arrow Road  
Guelph, ON, Canada  
N1K 1S6  
www.connecttech.com

Phone: 1-519-836-1291  
Toll free (in North America): 1-800-426-8979  
Fax: 1-519-836-4878  
Email: sales@connecttech.com

# BlueStorm/LP

## Applications



The low profile Universal PCI BlueStorm/LP serial port adapter is ideal for a variety of applications where economy of space and reliable data transfer are critical to the system design.

It is ideally suited for PC-based systems relying on high speed data transfer, such as point-of-sale card readers. Ease of use, cost effective design, a lifetime warranty and customization options ensure that the BlueStorm/LP is the best choice for your system design and for connecting serial devices of all kinds.

Available in two, four and eight port Universal PCI solutions, the BlueStorm/LP is well suited in applications such as:

- Point-of-sale/Retail
- Transportation stations
- Lottery terminals
- Automated Teller Machines
- Self-service kiosks

BlueStorm/LP and ATMs.  
What's the connection?

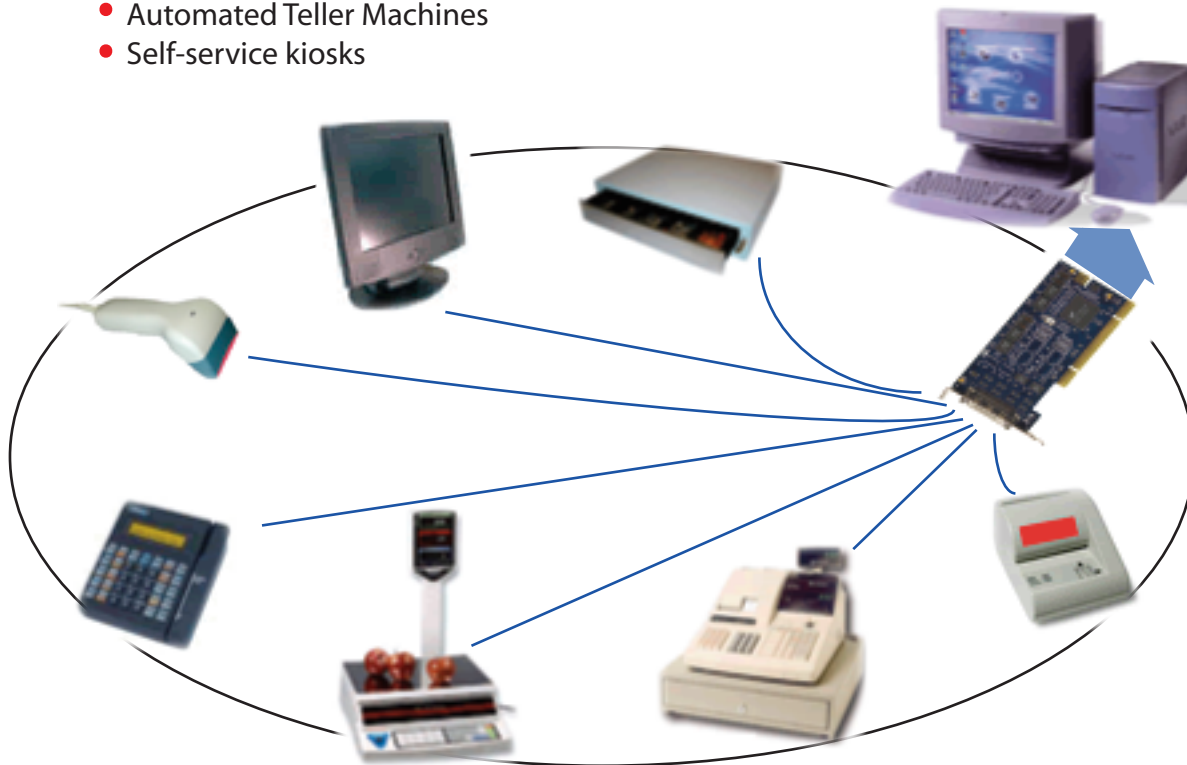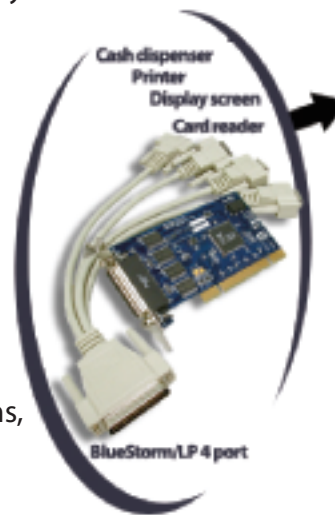

**Connect Tech Inc.**  
*Industrial Strength Communications*

42 Arrow Road  
Guelph, ON, Canada  
N1K 1S6  
[www.connecttech.com](http://www.connecttech.com)

Phone: 1-519-836-1291  
Toll free (in North America): 1-800-426-8979  
Fax: 1-519-836-4878  
Email: [sales@connecttech.com](mailto:sales@connecttech.com)