

SFX V.1.1

SFX-1215A 150W

Features

- SFX rev.1.1 compliant
- High Efficiency
- Remote on/off, Power good TTL Signal
- Short Circuit, Over Current & Voltage Protection
- UL / CUL, CB, TUV safety approved



Mechanical Drawing

Apply for

- All Intel Processors upto PIII
- All AMD Processors upto Duron

Environmental Specification

Operating / Storage Temp	0 ~ 50°C / -20 ~ 60°C
Relative Humidity	5 ~ 95%
Operating / Storage Altitude	10,000 / 50,000 FT
MTBF	100,000 HRS
Safety Approvals	UL/CUL, CB, TUV, Nemko
EMC Regulations	FCC, CE


Electrical Specifications

Input Voltage	100 -127/200 - 240VAC
	Manual select switch
Frequency	47 ~ 63 Hz
Input Current	4A @ 115VAC 2A @ 230VAC
Hold up time	14ms@ full load

Output Specification

Voltage	Regulation	Minimum Load	Maximum Load	Peak Load
+3.3V	+/- 5%	0.5A	7.0A	--
+5V	+/- 5%	1.0A	12A	14A
+12V	+/- 5%	0.5A	5.0A	8.0A
-12V	+/- 10%	0A	0.3A	--
+5Vsb	+/- 5%	0A	0.8A	--

* 3.3V & 5V combine load 83W

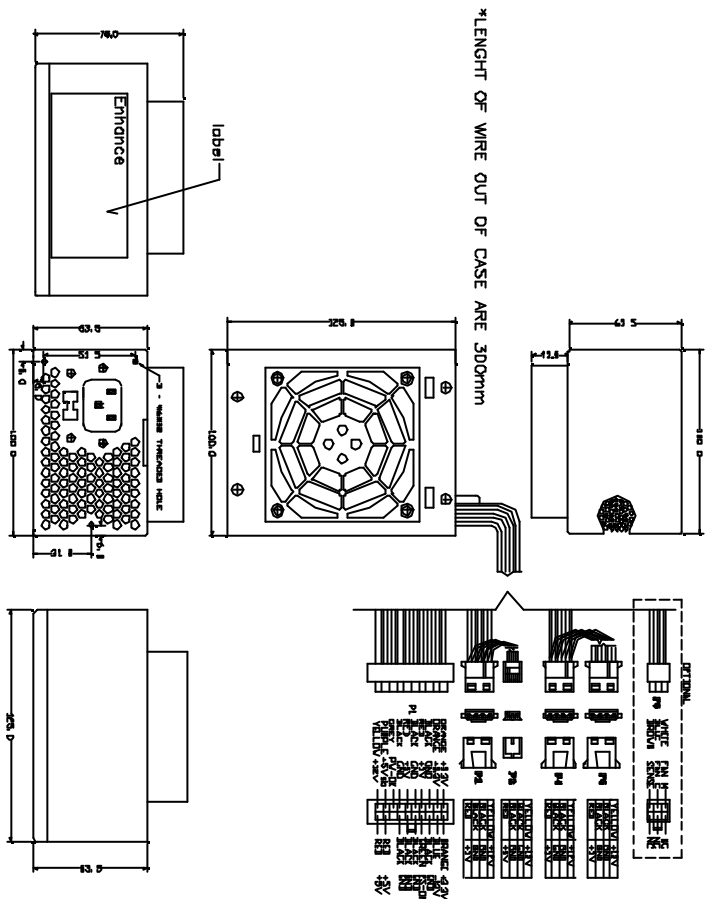

Dimension (W x L x H) : 125 x 100 x 77 mm