




PICMG® 2.16 PSB System/Peripheral Processor Blade

CompactPCI

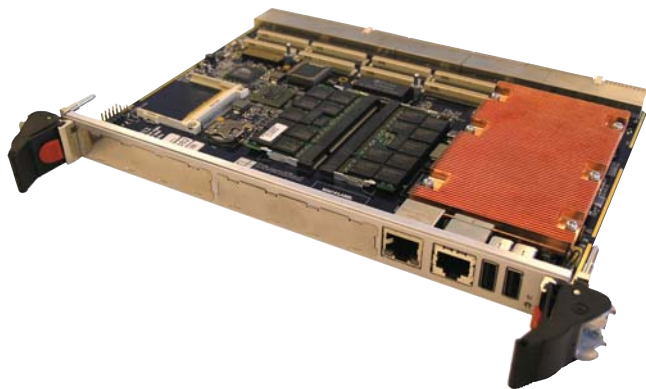

Diversified Technology's CPB4812 PICMG 2.16-compliant packet switched backplane (PSB) processor blade combines high performance with low power for telecom and Internet IP-based applications.

The CPB4812 features the high performance Intel® Core™2 Duo processor at speeds up to 2.16GHz with 4MB L2 cache. The CPB4812 is based on the Intel® 3100 chipset with 667MHz front side bus. System memory of up to 4GB is supported via two DDR2-400 SO-DIMMs. Onboard are dual Gigabit Ethernet ports routed according to PICMG 2.16, one 10/100/1000Mbps Ethernet port available at the front panel, one XMC/PMC site (64-bit/133MHz and x4 PCIe) with PIM, one PMC-only site (64-bit/133MHz) with PIM, High Speed USB, and 2 serial ports. The CPB4812 also includes a two-stage watchdog timer for enhanced system reliability.

The CPB4812 can operate in any slot of a PICMG® 2.16-compliant Packet Switched Backplane (PSB). It can function as the System host when in the System slot, and it operates in Drone mode when in a Peripheral slot. PICMG® 2.9 system management is also supported via a satellite management controller.

The CPB4812 system/peripheral processor blade is a cost effective choice for application developers addressing high performance, converging Telecom and Internet IP-based markets such as VPN switches, media gateways, 2.5G/3G wireless, server clusters, IP DSLAM and voice/video/data servers.

Product Features

Form Factor

PICMG 2.16 CompactPCI CPU Blade

CPU/Cache

Intel® Core™2 Duo processor with max speed of 2.16GHz and up to 4MB L2 cache

Bus Interface

- Intel® 3100 Chipset
- 667MHz Front Side Bus; 32-bit/33MHz CompactPCI Bus interface

Memory

- (2) SO-DIMM sockets
- 512MB to 4GB of DDR2-400 memory

I/O

- (2) Gigabit Ethernets on 2.16 Switched Fabric
- (1) 10/100/1000 ENET Interface on Front Panel
- (3) Serial ATA ports to RTM
- (1) CompactFLASH socket
- (1) XMC/PMC Site with PIM I/O to RTM
- (1) PMC-only Site with PIM I/O to RTM
- (2) USB 2.0 ports on Front Panel
- (2) USB 2.0 port to RTM
- (1) Serial port on Front Panel
- (1) Serial port to RTM
- (2) x1 PCIe ports to RTM

Physical Dimensions:

- 9.2" x 6.3" x 0.8"
- 6U CompactPCI 2.16 form factor

OS Support

64-bit and 32-bit support for:
Windows Vista, Windows XP,
Windows 2008 Server R2, Enterprise Linux

Warranty

Parts and labor covered for 2 years

CPU/Cache

- Intel® Core™2 Duo processor (up to 2.16GHz)
- 32KB on-die L1 cache; up to 4MB on-die L2 cache

Bus Interface

- Intel® 3100 Chipset
- 667MHz Front Side Bus; 32-bit/33MHz CompactPCI Bus interface
- System/Drone mode selectable
- 5V/3.3V CompactPCI signaling in System mode
- Supports up to two onboard 64-bit/133MHz 3.3V PMC cards
- Supports one onboard x4 PCIe XMC card

Memory

- Two DDR2 SO-DIMM sockets
- Memory must be registered and ECC-capable for integrity
- 512MB to 4GB of total memory
- DDR2-400 memory speed

Data Path

- 64-bit/667MHz on CPU and memory bus
- 32-bit/33MHz on off-board CompactPCI bus
- 64-bit/133MHz on onboard PCI bus
- x4 PCIe

Flash Memory

- 1MB Flash for BIOS
- 1 CompactFLASH socket

Ethernet

- Two Gigabit Ethernet Interfaces on 2.16 Switched Fabric
- One 10/100/1000 Ethernet Interface on Front Panel

Peripherals and I/O Interfaces

- Three SATA interfaces to RTM
- Up to two 64-bit/133MHz PMC sites with PIM
- One x4 PCIe XMC site with PIM
- Hardware Monitor

I/O Interface	Front Panel	Rear Panel
COM 1	RJ-45	N/A
COM 2	N/A	J4
USB #1	USB Connector	N/A
USB #2	USB Connector	N/A
Gigabit Ethernet	N/A	J3
Gigabit Ethernet	N/A	J3
10/100/1000 Ethernet	RJ-45	N/A
Serial ATA	N/A	J4
PCIe	N/A	J4
Video	XMC/PMC	PIM from XMC via J5
USB #3	N/A	J4
USB #4	N/A	J4

Note: Rear Panel I/O accessible with DTI's Rear Transition Modules.

Supervisory

- Two-stage programmable watchdog timer drives interrupt on 1st stage and hardware reset on 2nd stage

Management

- Integrated IPMI 1.5-compliant satellite management controller
- Communicates with system management BMC or host processor
- Compliant with PICMG 2.9

Interoperability

- Validated to operate in a PICMG 2.16-compliant system platform such as DTI's PlexSys-4D
- 3rd party PSB products

OS Compatibility

- 64-bit and 32-bit support for: Windows Vista, Windows XP, Windows 2008 Server R2, Enterprise Linux

BIOS

- AMI BIOS
- PCI 2.2
- ACPI 1.0b and 2.0
- SMBIOS 2.3.1

BIOS (cont'd)

- PnP 1.0a
- Serial console redirection
- Multi-boot Support (Floppy, HD, CD, USB, Network)
- Legacy USB Support
- S.M.A.R.T. Support
- Pop-up Boot Menu
- PXE 2.1 Boot Rom
- Enhanced Intel® SpeedStep® Technology

Clock / Calendar

- Real-time clock with battery backup CMOS RAM

Mechanical

- 9.2 in. x 6.3 in. 0.8 in. (233.35 mm x 160 mm x 20.32 mm)
- 6U x 4HP
- Conforms to PICMG 2.0 R3.0 (Core), 2.9 (Management) 2.12 (SW interoperability), 2.15 (PTMC) and 2.16 R1.0 (PSB) specifications

Power Requirements

Board Version	Max Power	Typical Power
1.06GHz Core 2	29W	27W
1.50GHz Core 2	35W	33W
2.16GHz Core 2	45W	40W
2.16GHz with XMC2400 and URT4812	60W	50W

Environmental**Operating**

- Temperature: -5° to 55°C
- Humidity (RNC): 10% to 85% non-condensing
- Altitude: 4,000m / 13,000 ft @40°C
- Shock: 10g 11ms half-sine
- Vibration: 5-100Hz @ 1g sine sweep
Random 5-20Hz @ 0.01g2/Hz; 20-500 -3dB slope

Storage and Transit (in approved packaging)

- Temperature: -40° to 70°C
- Humidity (RNC): 10% to 90% non-condensing
- Altitude: 12,192m / 40,000 ft
- Shock: 40g 6ms half-sine, 500/axis
- Vibration: 5-50Hz @ ½g 50-100Hz @ 3g sine sweep
Random 5-20Hz @ 0.01g2/Hz; 20-500 -3dB slope

Reliability and Serviceability

- MTBF: 230,296 hours @ 25°C
Calculated using Telcordia Issue 1, Method I, Case 3
- 2 year limited warranty

Regulatory Compliance

- Designed for NEBS/ETSI Compliance
- CE Certification with national deviations
- Safety (pending): UL/cUL 60950-1:2007; EN/IEC 60950-1:2006
- EMI/EMC: FCC 47 CFR Part 15 Class A;
EN 55022:2006; EN 50024:1998

Ordering Information**CPB4812/1060**

CPU Blade with 1.06GHz Intel Core 2 Duo processor, 2MB L2 cache

CPB4812/1500

CPU Blade with 1.50GHz Intel Core 2 Duo processor, 4MB L2 cache

CPB4812/2160

CPU Blade with 2.16GHz Intel Core 2 Duo processor, 4MB L2 cache

* All provide long life-cycle support

Options

- CRT4812 Rear Transition Module
- URT4812 Rear Transition Module
- XMC2400 Video Card
- PMC/PIM Integration

All products are shipped FOB factory (MS). Specifications subject to change without notice. Trademarks are the property of their respective owners.
(C) Copyright 2009 by Diversified Technology, Inc. All rights reserved.