


1GDP5100

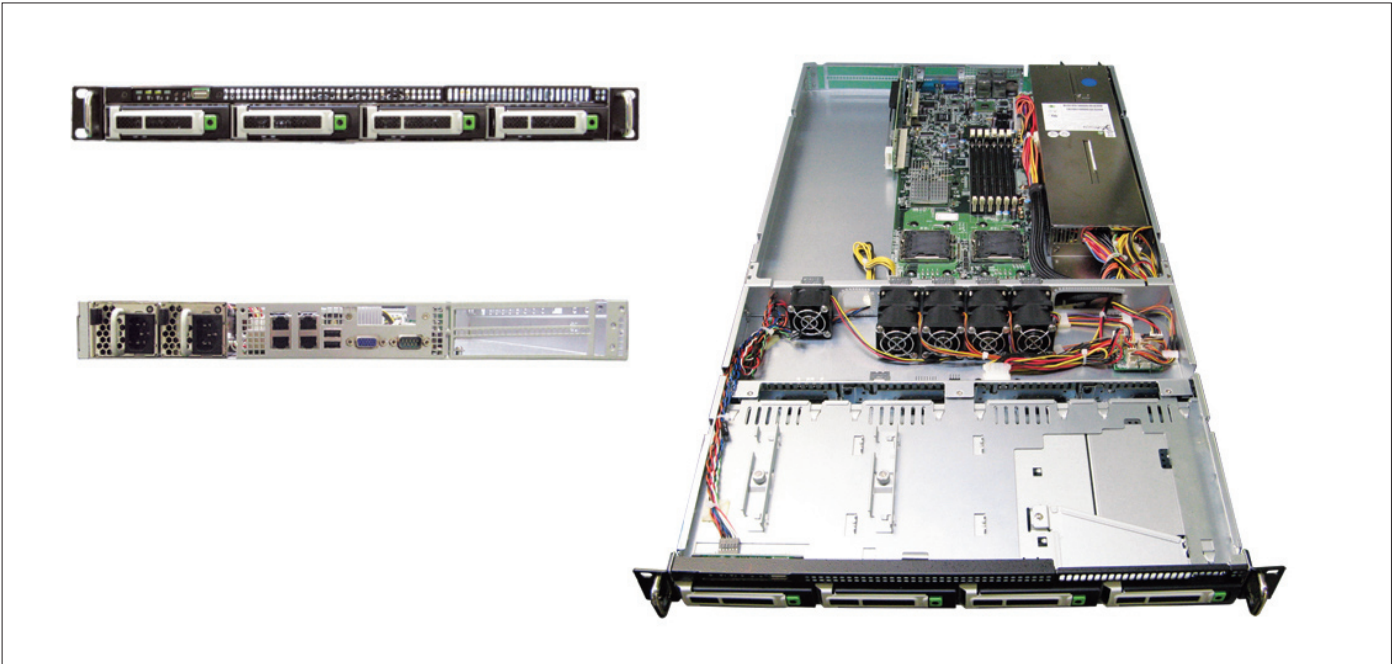

Features

Description

CPU Support :	Up to Two Intel® Dual-Core Xeon® Processor 5100/5200 Series Intel® Quad-Core Xeon® Processor 5300/5400 Series
Memory :	Six Dual Rank ECC Reg. DDR2 DIMMs, Max. 48 GB
Gigabit Ethernet :	4 x external GbE with RJ-45 header
Expansion Slots :	Max. IO expansion Up to 3 x slots via riser card Option A: 2 x PCI-Express X8 full height cards Option B: 1 x PCI-Express X8 + 1 PCI-X 133MHz full height card Option C: 2 x PCI-X 133MHz full height cards Option D: 1 x PCI-Express X16 double slot graphic card with 1 PCI-Express X8 (X4 link) low profile card
System FAN :	1 x 16,000rpm 4056 + 1 x 16,000rpm 4028 fan
Server Management :	IPMI 2.0; Optional iKVM support
Drive Bay :	External : 4 x 3.5" hot-swap bays + 1 x slimtype optical drive Internal : 2 x 2.5" HDDs (for OS HDD)
Other Outlets :	Front: 1 x USB 2.0 1 x set of power, reset, system ID, NMI buttons, 1 x set of GbE LAN, system ID, NMI, power status, system status, HDD active indicators Rear: 1 x VGA output, 1 x COM port, 2 x USB 2.0
Power Supply :	450W+450W hot-swappable redundant
Chassis Dimensions (WxHxD) :	430mm x 44mm x 711mm

AIC

Advanced Industrial Computer, Inc.

PIG Platform Solutions Group Xstore Xtreme Storage