

# ULTRA MINIATURE CERAMIC SMD CRYSTAL



ABM8

3.2 x 2.5 x 0.7mm

ABM8



**RoHS**  
Compliant

## FEATURES:

- Low in height; suitable for thin equipment.
- Ceramic package and metal lid assures high reliability.
- Tight tolerance and stability available.
- Suitable for solder reflow.
- High precision crystal, fundamental mode.

## APPLICATIONS:

- High density applications.
- Modems, communication and test equipment.
- PCMCIA, Wireless applications.

## STANDARD SPECIFICATIONS:

### PARAMETERS

ABRACON P/N	ABM8 Series
Frequency Range	10.00 MHz - 60.00 MHz
Operation Mode	Fundamental
Operating Temperature	-10°C to +60°C (see options)
Storage Temperature	-55°C to +125°C
Frequency Tolerance at +25°C	± 50 ppm max. (see options)
Frequency Stability over the Operating Temp. (Ref to +25°C)	± 50 ppm max. (see options)
Equivalent Series Resistance	See Table 1
Shunt Capacitance C <sub>0</sub>	7pF max.
Load Capacitance C <sub>L</sub>	18pF (see options)
Drive Level	100μΩ max., 10μΩ Typical
Aging at 25°C First Year	± 5ppm max.
Insulation Resistance	500MΩ min. @ 100Vdc ± 15V

TABLE 1

FREQ (MHz)	ESR (Ω)max.
10.000 - 15.999	200
16.000 - 19.999	100
20.000 - 29.999	80
30.000 - 60.000	50

## OPTIONS AND PART IDENTIFICATION (Left blank if standard):

ABM8□ - Frequency - □ - R□□□ - □ - □ - □ - □

Height (mm)	
Blank	0.70+/-0.10
1	0.65+/-0.05
2	0.60+/-0.10
3	0.55+/-0.05

Frequency	
XX.XXXX	MHz

Load Capacitance	
Please specify CL in pF or S for Series (minimum 7pF)	

\*Consult with ABRACON for CL value under 10pF.)

ESR	
RXXX	(value in ohms if it is custom.)

Operating Temp.	
E	0°C to +70°C
B	-20°C to +70°C
C	-30°C to +70°C
N	-30°C to +85°C
D	-40°C to +85°C

\*Contact ABRACON for wider temp range.

Freq. Tolerance	
1	± 10 ppm
7	± 15 ppm
2	± 20 ppm
3	± 25 ppm
4	± 30 ppm

Packaging	
T	Tape and Reel

Please see Page 6 for quantity

Freq. Stability	
U	± 10 ppm (*)
G	± 15 ppm (*)
X	± 20 ppm
W	± 25 ppm
Y	± 30 ppm
H	± 35 ppm
Z	± 100 ppm (#)

(\*) -10°C to +60°C only

(#) For extended temperatures

\*Contact ABRACON for tighter freq. stability.



# ULTRA MINIATURE CERAMIC SMD CRYSTAL



ABM8


3.2 x 2.5 x 0.7mm

ABM8




RoHS  
Compliant

➤ **OUTLINE DRAWING:** Please see Table 2 below for height and chamfer information

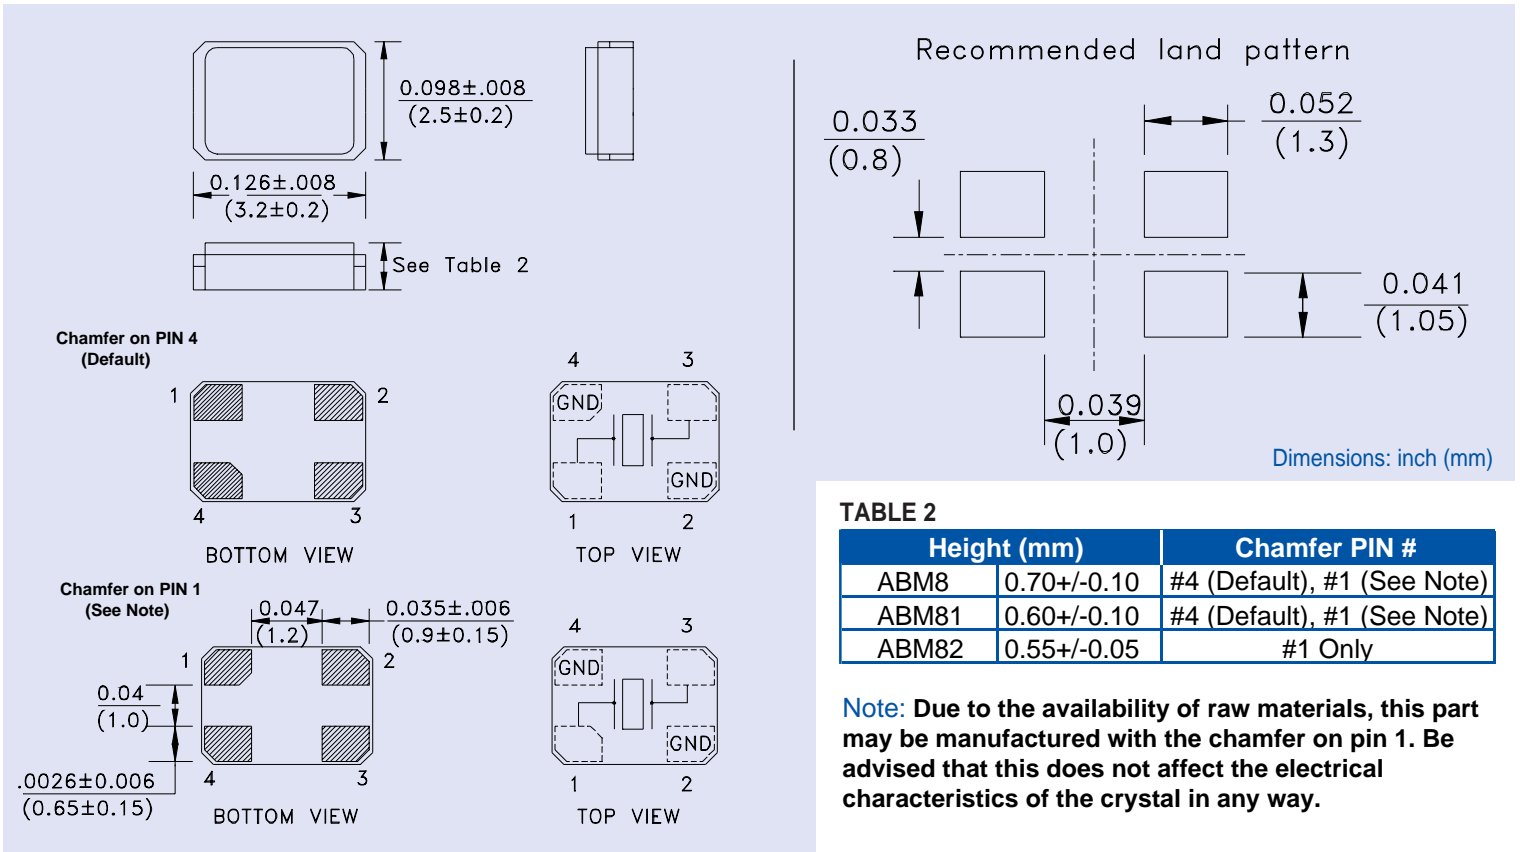

➤ **TAPE & REEL:**

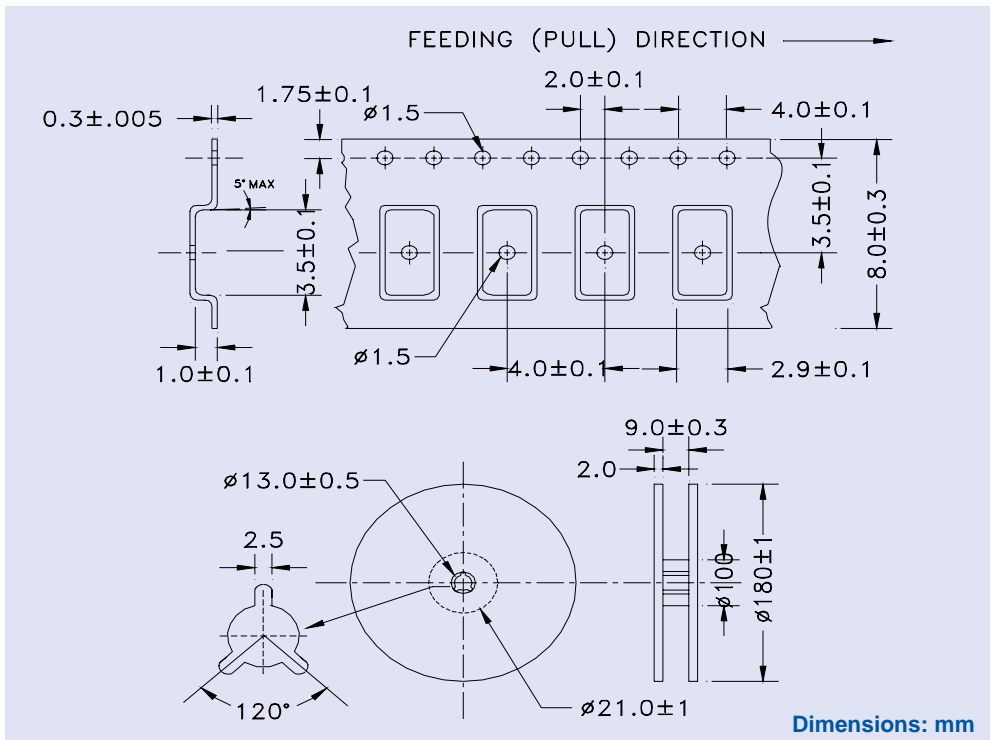

ABRACON IS  
ISO 9001 / QS 9000  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 07.10.07**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)