


ETX & COM Express ET710

Intel® Mobile Pentium® III ETX CPU Module w/ Intel® 815E

Mobile Pentium® III-Based

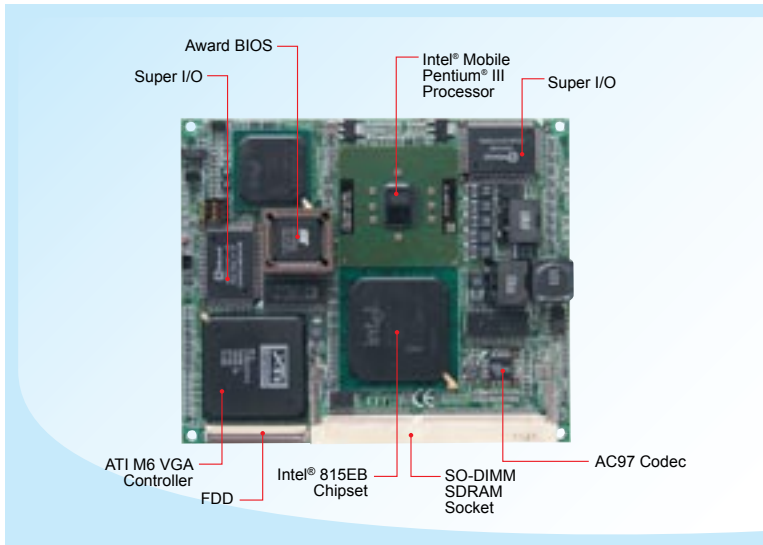

>> Features

- Embedded Intel® Mobile Pentium® III / ULV Celeron® processor, 400MHz / 933MHz, 100/133MHz FSB
- SDR SO-DIMM x 1, Max. 512MB
- ATI M6-C/D VGA, 8/16MB, CRT/LCD
- Intel® 82801 10/100 BaseT Ethernet
- Watchdog timer, PCI to ISA bridge
- 4 x USB 1.1 ports

System

CPU	Intel® Mobile Pentium® III- Low Power / Ultra Low Voltage Celeron®, up to 933MHz
System Memory	SDR SODIMM x 1, Max. 512MB
System Chipset	Intel® 815E, 100/133MHz FSB
BIOS	Award
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slot	On baseboard

Graphics

VGA Controller	ATI M6M / M6C
VGA Memory	8MB/16MB embedded
LCD Interface	24-bit LVDS (dual channel)

Ethernet

LAN Controller	ICH2 integrated + 82562ET, 10/100Mbps
Connector	On baseboard

Multi I/O

Chipset	Winbond W83627HF 2x IDE (UDMA33/66/100), 1x FDD, 1x KB, 1x Mouse, 2x RS-232, 1x LPT
USB	4 ports (USB 1.1)
Audio	Built-in audio + AC97 codec
Others	IrDA

Mechanical and Environmental

Dimensions	95mm x 114mm (3.74" x 4.49")
Max. Power Requirement	+5V: 7A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-68°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

ET710-400-R	Intel® ULV Celeron® 400MHz 815E ETX CPU module w/ ATI M6M 8MB VGA and 10/100 LAN (RoHS compliant)
ET710C-933-R	Intel® Mobile Pentium® III 933MHz 815E ETX CPU module w/ ATI M6C 16MB VGA and 10/100 LAN (RoHS compliant)

Remarks:

* Specifications are subject to change without prior notice.

ETX & COM
Express

For user's manual & datasheet download, visit www.ibase.com.tw