

DESCRIPTION

Designed for high wattage applications with lens and adjustable trims.

Catalog #	Type
Project	
Comments	
Prepared by	Date

SPECIFICATION FEATURES

A...Housing

Housing can be removed from plaster frame for junction box access.

B...Junction Box

Junction Box has 1/2" and 3/4" knockouts.

C...Bar Hangers

One piece Bar Hangers span 16" joists.

D...Socket

Porcelain socket with nickel plated screw shell.

E...Integral Thermal Protector

Integral thermal protector guards against misuse of insulation materials and improper lamping.

Labels


U.L. damp location, U.L. Feed Through, IP Rated, CSA Certified.



H8T

150W R40
200W A23

8" RECESSED
INCANDESCENT
DOWNLIGHT

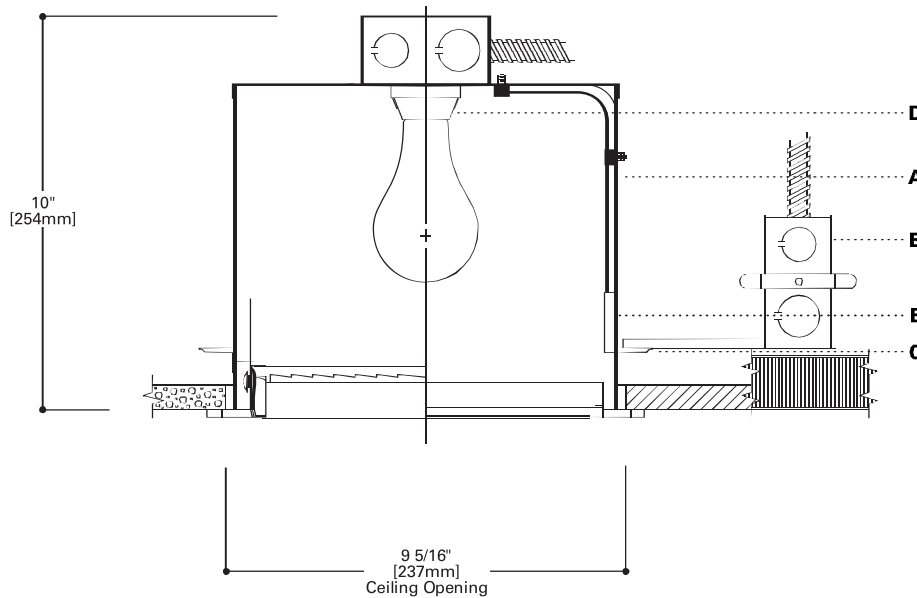

ORDERING INFORMATION

SAMPLE NUMBER: H8T80P

Complete unit consists of housing and trim.

Housing

H8T

H8T=8" Non-IC High
Wattage Housing

Trims



LENS

Albalite Lens -Wet Location listed
200W A23
80P=White
OD: 11 5/16" (303mm)



Fresnel Lens - Wet location Listed
200W A23
83P=White
Wet Location Listed
OD: 11 5/16" (303mm)



EYEBALL

Regressed Eyeball
150W R40
89P=White
OD: 10 5/8" (270mm)

ADV042523
Supersedes ADV000331

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com