




RC-742

19" 4U High, Full-size Rackmount Chassis with Backplane, ATX/Redundant P/S

Industrial Chassis

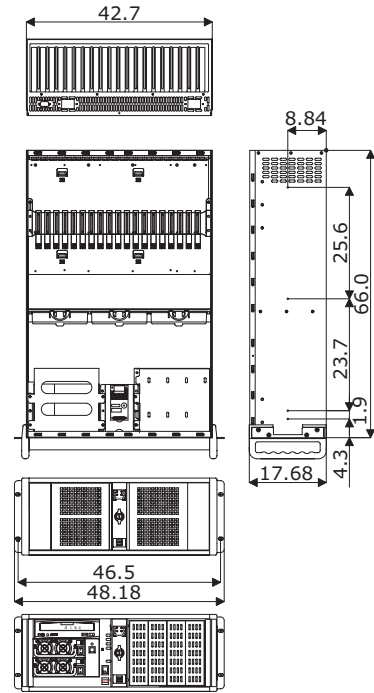

Features

- ◆ 19" 4U high, rackmount chassis compliant to EIA RS-310C standard
- ◆ Detachable card cage for easy installation and maintenance
- ◆ Provides 20-slot backplane, 250W/300W/350W/400W ATX power supply or mini redundant 300W+300W power supply
- ◆ 5 x external 5.25" space, 1 x internal 3.5" space
- ◆ 12cm hot swap ball bearing cooling fan x 3
- ◆ Dual lockable latch doors
- ◆ FCC/CE industrial Class A approval
- ◆ System environmental monitor (optional)

Ordering Guide

- ◆ **RC-742B**
19" 4U High, Full-size Rackmount Chassis

Specifications

Chassis

Meets EIA RS-310C 19" 4U high, rackmount standard; heavy-duty steel, SECC 1.2t (Japan)

Drive Space

External: 5.25" space x 5

Internal: 3.5" space x 1

Front Panel

Power switch, reset button and USB x 2 or PS/2 keyboard connector; LED indicator x 6

Thermal Solution

12cm hot swap ball bearing cooling fan x 3;

System environmental monitor (optional) and removable air filter

Altitude

15,000 feet

Power Supply

250W/300W/350W/400W ATX power supply or mini redundant 300W+300W power supply

Temperature

0~+50°C (operating); 0~+70°C (storage)

Humidity

5~95%; non-condensing

Safety Standard

FCC/CE on chassis and FCC/CE/UL/TUV on power supply

Dimensions (L x W x H)

66.0 x 42.7 x 17.68 cm