


# PCI-ISA Bus Single Board Computer

## HS-6253

800MHz Embedded CPU PCI-ISA Bus SBC  
with CRT/Panel, Audio & Dual LAN

- ★ 133MHz FSB
- ★ CRT/Panel
- ★ Dual LAN
- ★ Audio
- ★ ATA/33/66/100
- ★ RS-232/422/485
- ★ 4 COM
- ★ PC/104
- ★ IrDA
- ★ USB
- ★ DOC
- ★ WDT
- ★ Single +5V
- ★ H/W Monitor

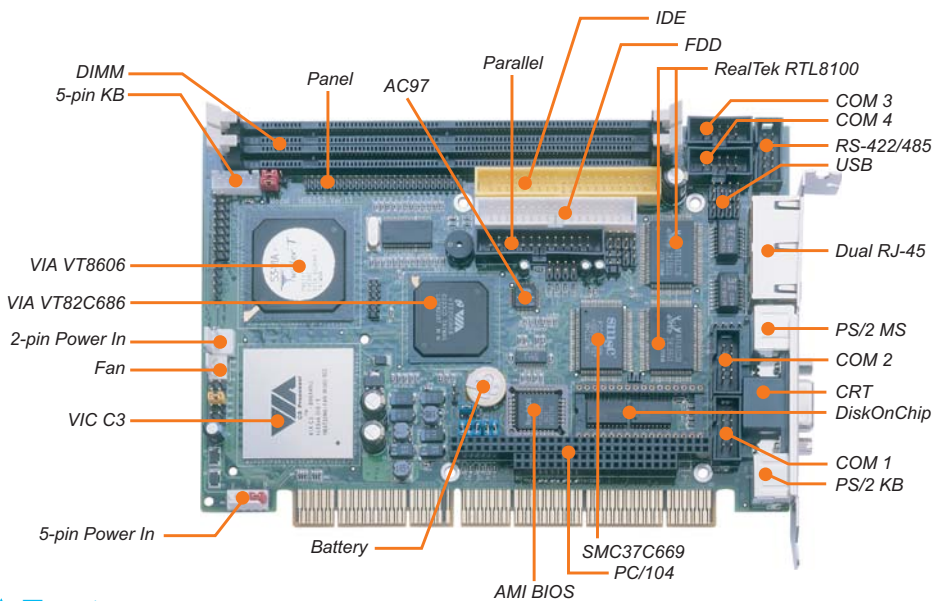

Single +5V!!

### ★ Ordering Guide

- **HS-6253**  
800MHz Embedded CPU PCI-ISA Bus SBC with CRT/Panel, Audio & Dual LAN
- **HS-6253V**  
800MHz Embedded CPU PCI-ISA Bus SBC with CRT/Panel
- **HS-6253LV**  
800MHz Embedded CPU PCI-ISA Bus SBC with CRT/Panel & LAN

### ★ Features

- VIA C3 800MHz Embedded CPU
- Supports 66/100/133MHz FSB
- Two DIMM sockets with a max. capacity of 1GB
- VIA VT8606/VT82C686B system chipset
- SMC 37C669, VIA VT82C686B super I/O chipset
- VIA VT8606 CRT/Panel display controller
- Dual RealTek RTL8100 10/100 Based LAN

- AC97 3D audio controller
- Fast PCI ATA/33/66/100 IDE controller
- Four COM, four USB connectors
- PC/104 Bus connector
- DiskOnChip socket supporting memory sizes of up to 288MB
- Supports Single +5V power in
- Supports Hardware Monitor

### ★ Specifications

- \* **CPU:** VIA C3 800MHz Embedded CPU
- \* **Bus Interface:** PCI-ISA Bus
- \* **Memory:** Two DIMM sockets with a max. capacity of 1GB
- \* **Chipset:** VIA VT8606/VT82C686B
- \* **I/O Chipset:** SMC 37C669, VIA VT82C686B
- \* **VGA:** VIA VT8606 integrated S3 3D supporting CRT/Panel displays
- \* **LAN:** Dual RealTek RTL8100 10/100 Based LAN
- \* **Audio:** AC97 3D audio controller
- \* **IDE:** Two IDE disk drives supporting ATA/33/66/100 and with transfer rates of 33/66/100MB/sec.
- \* **FDD:** Supports up to two floppy disk drives
- \* **Parallel:** One enhanced bi-directional parallel port supporting SPP/ECP/EPP
- \* **Serial Port:** 16C550 UART-compatible RS-232/422/485 x 1 and RS-232 x 3 serial ports with 16-byte FIFO

- \* **PC/104:** PC/104 connector for 16-bit ISA Bus
- \* **IrDA:** One TX/RX IrDA header
- \* **USB:** Four USB connectors
- \* **Keyboard:** PS/2 6-pin Mini DIN or 5-pin connector
- \* **Mouse:** PS/2 6-pin Mini DIN or 4-pin header
- \* **DiskOnChip:** DiskOnChip socket supporting memory sizes of up to 288MB
- \* **BIOS:** AMI PnP Flash BIOS
- \* **Watchdog Timer:** Sets 1/2/10/20/110/220 seconds activity trigger with Reset or NMI
- \* **CMOS:** Battery backup
- \* **Operating Temperature:** 0~60°C
- \* **Hardware Monitor:** VIA VT82C686B
- \* **Dimensions:** 18.6 x 12.2 cm



**BOSER Technology Co., Ltd.**

15F-6, No. 77, Hsin Tai Wu Road, Sec. 1, Hsichih, Taipei Hsien 221 Taiwan TEL : 886-2-26983333 FAX : 886-2-26983300  
<http://www.boser.com.tw> <http://www.isb.com.tw> <http://www.ipc.com.tw> E-Mail: [webmaster@boser.com.tw](mailto:webmaster@boser.com.tw)

**U.S.A.**  
TEL : +1 650 4280868  
FAX : +1 650 4281172

**U.K.**  
TEL : +44 1543 466552  
FAX : +44 1543 466553

**GERMANY**  
TEL : +49 221 954790  
FAX : +49 221 9547988

**ITALY**  
TEL : +39 051 452042  
FAX : +39 051 455046

**KOREA**  
TEL : +82 2 34737862  
FAX : +82 2 34743120

**FRANCE**  
TEL : +33 1 69061790  
FAX : +33 1 69433732

**ISRAEL**  
TEL : +972 3 9203456  
FAX : +972 3 9203555

**FINLAND**  
TEL : +358 2 6203753  
FAX : +358 2 6203770

**SHANGHAI**  
TEL : 021 63676295-8  
FAX : 021 63676286



Intel®  
Communications  
Alliance  
Affiliate Member

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.