


1		PART NUMBER	PS-205
2		ELECTRICAL	
	2.1	INPUT VOLTAGE/FREQ	95VAC TO 264VAC/47Hz TO 63Hz
		INPUT CURRENT	1.35A @ 115VAC/0.7A @ 230VAC
	2.2	OUTPUT VOLTAGE #1	+15VDC
		OUTPUT CURRENT #1	0.2A MIN. TO 2.0A MAX.
		RIPPLE	300mVp-p MAX.
		OUTPUT VOLTAGE #2	-15VDC
		OUTPUT CURRENT #2	0.1A MIN. TO 1.0A MAX.
		RIPPLE	300mVp-p MAX.
		LOAD REGULATION	+/- 5% @ FULL LOAD
3		ENVIRONMENTAL	
	3.1	OPERATION TEMP	0°C TO +70°
	3.2	STORAGE TEMP	-40°C TO +85°C
	3.3	RELATIVE HUMIDITY	5% TO 95% NON CONDENSING
	3.4	DERATING	100% @ 50°C LINEARLY TO 50% @ +70°C
4		GENERAL	
	4.1	EFFICIENCY	70% MIN. AT FULL LOAD
	4.2	HOLD-UP TIME	10mSEC MIN.
	4.3	LINE REGULATION	+/- 1% MAX. AT FULL LOAD
	4.4	INRUSH CURRENT	15A @ 115VAC/30A @ 230VAC
	4.5	M T B F	50,000 HRS.
5		SAFETY	
	5.1	EMI	FCC PART 15 CLASS B/CISPR 22 CLASS B
	5.2	APPROVALS	UL/CUL/TUV/CE



PS-205

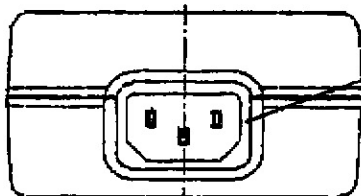