




EmCORE-i8527

5.25" Intel ULV Celeron M 600MHz Miniboard with CRT/ LCD, LAN, Audio, PC/104 & PC/104 Plus and DOC Socket

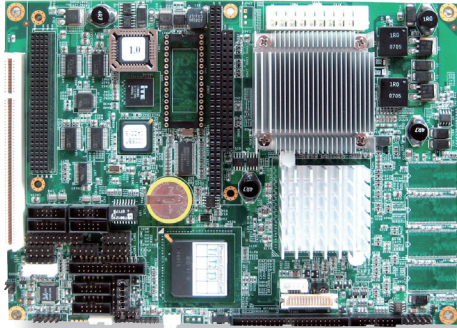

◀ **New!!**

Features

- Intel Ultra Low Voltage Celeron M 600MHz CPU Onboard (FSB400MHz)
- **Onboard 256MB DDR SDRAM**
- Support 18/36 bit LVDS and CRT
- Support Dual Display (Independent Display)
- **Support 10/100 Base-T Ethernet**
- 6 x High Speed USB 2.0 Ports
- Support CompactFlash Type II Socket up to 4 GB
- Support PCI, DOC, PC/104, PC/104 Plus
- **6 x RS-232 Serial Ports**

System

CPU	Intel Ultra Low Voltage Celeron M 600MHz CPU Onboard (FSB400MHz)
Memory	Onboard 256MB DDR SDRAM
Chipset	Intel 852GM + Intel ICH4
BIOS	Phoenix-Award PnP Flash BIOS
ATA/IDE	1 x Ultra DMA 33, support 2 IDE drives
Flash Disk	1 x CompactFlash Type II Socket, 1 x DOC Socket
Watchdog Timer	255-level Reset

I/O

Serial port	COM1,3,4,5,6: RS-232 COM2: RS-232/422/485 Selectable
Parallel port	SPP/EPP/ECP mode
Floppy	Support 1 Floppy disk drives share with parallel port
KB/MS	1 x PS2 K/B and Mouse
USB	6 x USB 2.0 compliant
Expansion Bus	1 x 32 bit/33MHz PCI slot 1 x 16 bit ISA-based PC/104 interface 1 x 32 bit PCI-based PC/104 Plus interface

Ethernet

Chipset	1 x Intel 82551QM 10/100 base-T Ethernet controllers
----------------	--

Audio

Codec/Interface	Realtek ALC655 AC97 Codec, support Mic-in/Line-in/Line-out
------------------------	--

Display

Graphics Chipset	Intel 852GM Extreme Graphics Engine up to 64Mbyte UMA Video RAM
Graphics Interface	CRT support up to 2048 x 1536 LVDS support 18/36 bit up to 1600 x 1200 Dual mode independent display

Mechanical & Environmental

Power Consumption	EmCORE-i8527VL/CM600: 5V/2.28A (Typical)
Operating Temp.	0 ~ 60°C (32 ~ 140°F)
Operating Humidity	5 ~ 95% (non-condensing)
Dimension (L x W)	203 x 146 mm (8" x 5.75")

Ordering Information

EmCORE-i8527VL/CM600	5.25" Intel ULV Celeron M 600MHz Miniboard with CRT/ LCD, LAN, Audio, PC/104 & PC/104 Plus and DOC
Cable Kit	CBK-16-8527-00