

VTC4795465


Applications

- Firewall / VPN
- Telephony / Telecom / VoIP
- Network / Security Appliance
- Military Application
- HPC Clustering



Features & Benefits

- 1 One(1) external slim CD-ROM supported
- 2 Power on/off, system reset and LEDs for HDD & LAN
- 3 Optional LCD Modules with keypads
- 4 Superior cooling through front air intake
- 5 Three(3) hot-swap fans for optimized cooling
- 6 One(1) internal 3.5-inch HDD supported
- 7 Riser card mounting bracket
- 8 One(1) internal 2.5-inch HDD supported
- 9 Two(2) PCI slots via riser card
- 10 1U form factor power supply

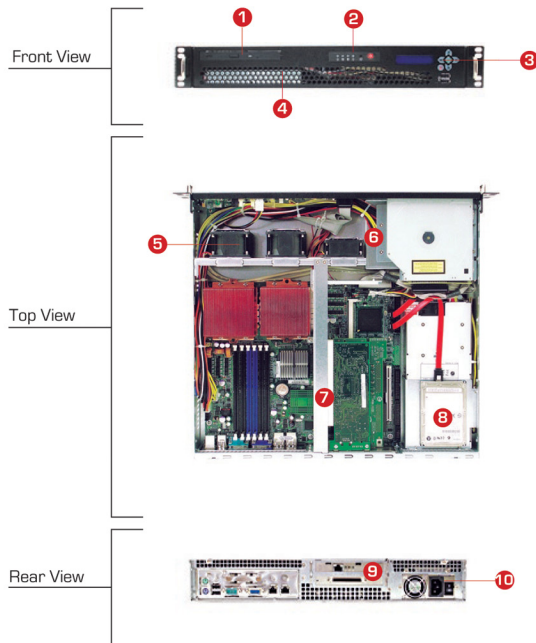

Materials: Heavy-duty preplated SPGC cold-rolled steel	
Finish :	Outside / Front : Texture-coated on front panel
Dimensions : (W x D x H)	mm : 482.6 x 390.2 x 65.9
	inches : 19 x 15.4 x 2.6
Cooling :	Front: 1 x 60x25mm + 2 x 60x38mm
Power Supply :	● Descriptions
	40E 400W EPS-12V PFC
Expansion : 2-slot PCI via riser card	
Controls : Power on/off and system reset	
Indicators : Power, 2 x LAN, and HDD LEDs	
System Board : Up to 12"(W) x 10.5"(D) ATX/SSI CEB compliant MB	

Drive Bay :	External	5.25"	0
		3.5"	0
		3.5" hot-swap	0
		2.5" hot-swap	0
	Internal	3.5" HDD bay	1
		2.5" HDD bay	1
	Slim CD-Rom/DVD-Rom		1
	Slim FDD		0
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 10 kgs / 22 lbs			
Packaging Dimension (W x D x H) :		mm : 570 x 630 x 190	
Riser Card Options :	RCD-15U8E1XRIB	RCD-15UX1X1RIB	
Mounting Options:	FRR-1U20-CR	FRR-1U26-C-R	
LCD Module Options: ■	A	LCD-CFA633USB	
	B	LCD-CFA633	

Mechanical Drawing

