


XTX Carrier Board

07

XTX CPU Modules - Carrier Board

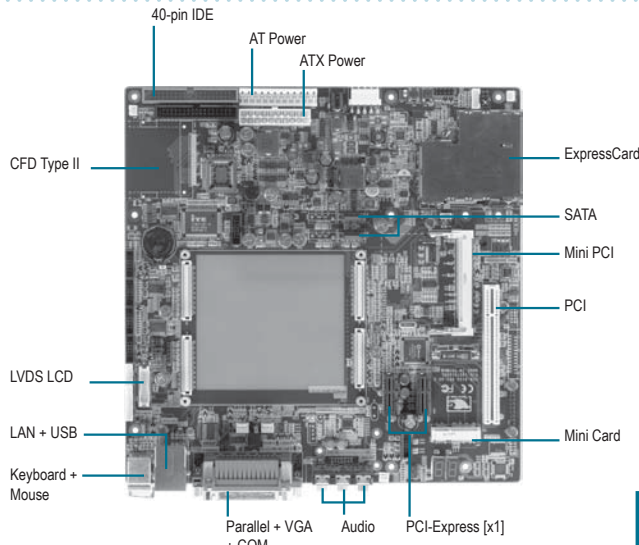

Features

- Supports XTX Module
- VGA/ LVDS/ TV-out Connector
- RJ-45 x 1, 10/100Base-TX Ethernet
- 5.1 Channel Audio (Optional)
- CompactFlash™ Type II Slot x 1 (For XTX-915 only)
- PCI Express [x1] Slot x 2/ PCI Slot x 1
- ExpressCard Slot x 1/ Mini PCI Slot x 1/ Mini Card Slot x 1
- SATA Port x 4 (For XTX-915 only)
- USB Port x 3/ COM Port x 4
- LPC Connector x 1
- AT/ ATX Power Input
- Micro ATX Form Factor

Specifications

System	
Form Factor	Micro ATX
I/O Chipset	ITE IT8712KX
Ethernet	10/100 Base-TX, RJ-45 x 1
Expansion Interface	PCI-Express [x1] slot x 2 ExpressCard slot x 1 Mini Card slot x 1 PCI slot x 1 Mini PCI slot x 1
Power Supply Type	AT/ ATX
Board Size	9.6" (L) x 9.6" (W) (243.84 mm x 243.84 mm)
Gross Weight	1.32 lb (0.6 Kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	60,000
Display	
VGA	DB15 connector x 1
TV-out	8-pin (4x2) box header S-Video and Composite video
LVDS	Dual-channel LVDS connector (15x2-pin) x 1
I/O	
Storage	PATA x 1, Floppy Disk Drive x 1 CompactFlash™ Type II slot x 1 (TF-ECB-910M-A10) SATA x 4 (TF-ECB-910M-A10) SATA x 2 (TF-ECB-910M-A10-01)
Serial Port	RS-232 x 3, RS-232/422/485 x 1
Parallel Port	SPP/ EPP/ ECP mode
USB	3
PS/2 Port	Keyboard x 1, Mouse x 1
Digital I/O	Supports 8-bit (Programmable)
IrDA	One IrDA Tx/Rx header
Audio	Mic-in, Line-in, Line-out



Packing List

- Quick Installation Guide
- Utility CD
- ECB-910M

Ordering Information

- **TF-ECB-910M-A10 (For XTX-915)**
XTX Carrier Board, LAN, Audio, 4 COM, USB, PCI-E, CompactFlash™, 4 SATA, AT/ ATX, Rev.A1.0
- **TF-ECB-910M-A10-01 (For XTX-945)**
XTX Carrier Board, LAN, Audio, 4 COM, USB, PCI-E, 2 SATA, TPM, AT/ ATX, Rev.A1.0