


» JReXplus-DC «

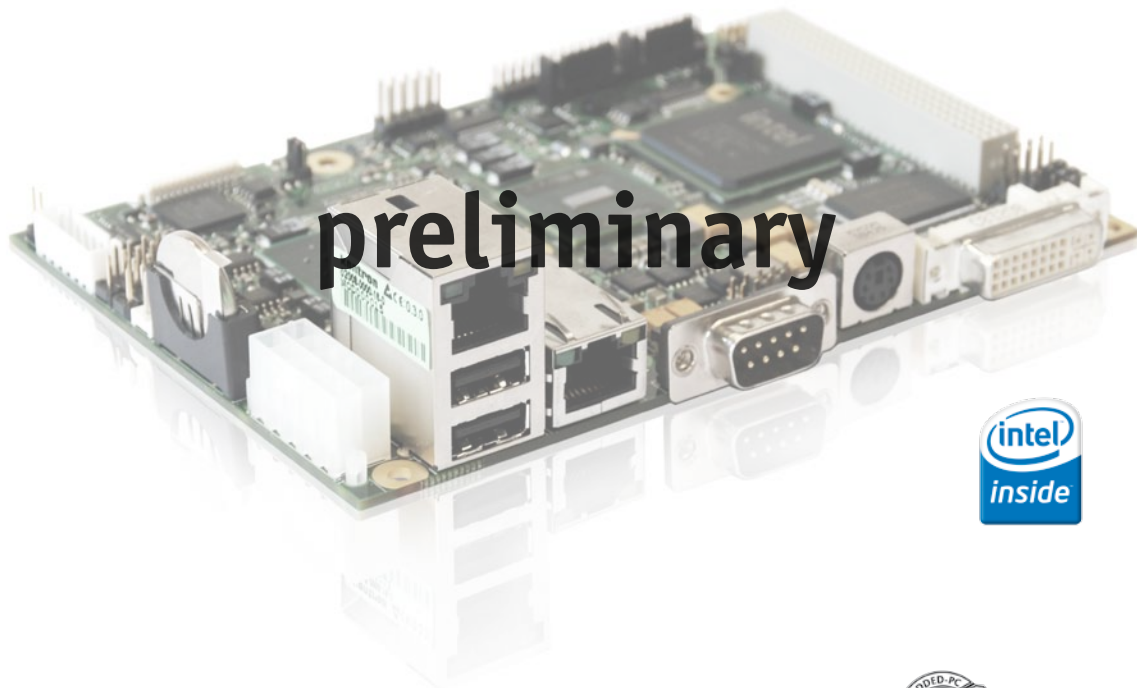

3.5" embedded line


3.5" SBC with Intel® Atom™ N270 processor

- » PCI-104 compatible expansion interface
- » Intel® 945GSE, Intel® ICH7M Chipset
- » Up to 2 GByte DDR2 SDRAM
- » 6x USB2.0, Dual LAN, Dual SATA and PATA 44
- » Low power consumption with latest energy saving 45nm technology

Technical Information

Processor / CPU Clock	Intel® Atom™ N270 processor 1.6 GHz / FSB 533 MHz
Chipset	Intel® 945GSE, Intel® ICH7M
Audio Controller	HD Audio
BIOS	AMIBIOS®
Cache	L2: 1 x 512 KByte
Compliance	PCI-104™ bus compatible expansion interface (PCI), miniPCIe, RoHS compliant
Cooling	passive / active depending on application
Dimensions (H x W x D)	102 x 147 mm, 3,5"
Ethernet	1 x 10/100 *, 1 x 10/100/1000
Graphic	Integrated with Intel® GMA950 (DirectX® 9, PS 2.0), shared memory CRT/DVI, Dual Channel LVDS (JILI30)
Hard Disk	2 x SATA *, 1 x PATA 44 * (EIDE (UDMA-100))
Interfaces	1 x DSUB RS232 *, 1 x RS232 internal *, CompactFlash™ Card Socket
Memory	DDR2-SODIMM up to 2 GByte
Power Supply / Management	ATX power supply / APM 1.2, ACPI 2.0
Special Features	TPM 1.2 *, 4bit GPIO *
Temperature	Operating: 0° C – 60° C / Storage: tbd (Ask about extended temperature ranges)
USB	6 x USB 2.0 (2 on front panel, 4 internal *)

* Optional, depending on product variants

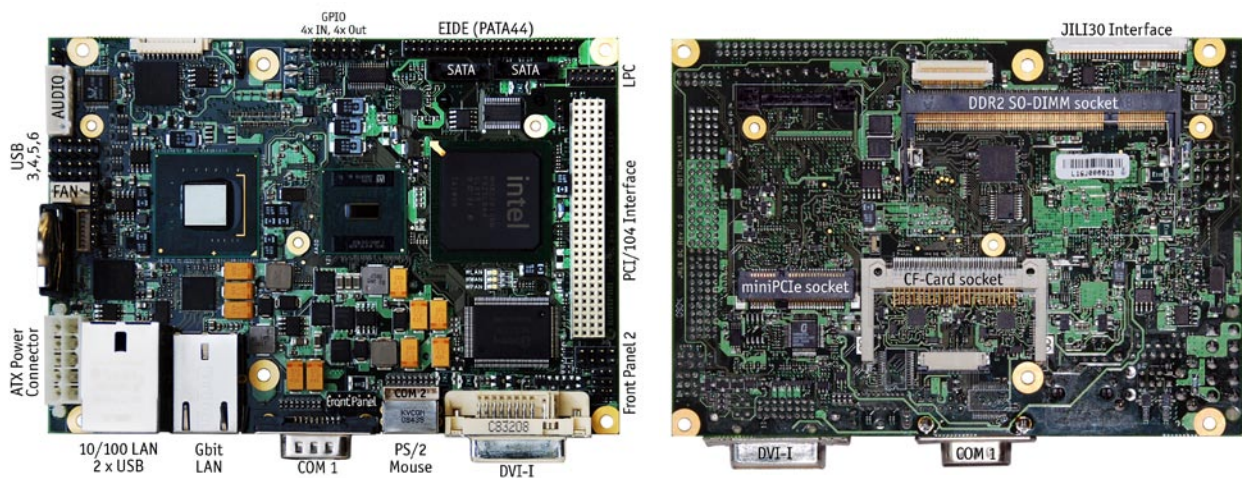

Ordering Information

Article	Part.-No.	Description
JRexplus-DC plus	02008-0000-16-0	JRexplus-DC - 3.5" SBC with Intel Atom™ N270 1.6 GHz, Chipset i945GSE + ICH7M, DVI-I, 24Bit LVDS Interface JILI30, 2xCOM, 1x LPT, 10/100 MBit LAN, 10/100/1000Mbit LAN, 6xUSB, HD Audio, EIDE 44pin, MiniPCIe, TPM, PCI/104+ interface, DDR2-SODIMM-socket up to 2Gbyte, Compact-Flash socket, ATX power supply
JRexplus-DC standard	02008-0000-16-2	JRexplus-DC, 3,5" SBC with PCI-104 interface, Intel® Atom™ N270 processor, 2 x SATA, 2 x LAN, CRT/DVI, JILI30 LVDS interface, Backlight support, 2x RS232 interface, 6x USB, CF-CARD-Socket, MiniPCIe, ATX power supply
JRexplus-DC plus Starterkit	02108-0000-00-S	JRexplus-DC plus Starterkit. 3.5" SBC with PCI-104 interface, Intel® Atom™ N270 processor, PATA44, 2x SATA, LPT, 2x LAN, CRT/DVI, JILI30 LVDS interface, Backlight support, 4Bit GPIO, TPM 1.2, 2x RS232 interface, 6x USB, CF-CARD-Socket, MiniPCIe, ATX power supply, incl. JRexplus-DC plus 1.6 GHz, 1GB DDR2 RAM, cables & accessories, packed in plastic case

CORPORATE OFFICES

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 279
info@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building,Block #1,ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn

