




- Material: Polyethylene Terephthalate — PET
- Provides continuous abrasion resistance for wires, cables and tubing
- Lightweight, durable protection
- Highly flexible open weave will not trap heat or humidity
- Rated for use up to 125°C
- Allows for use with irregular shapes
- Stock colours: Black, grey and white



**The Functional Part Number System Makes Ordering Easy
Braided Expandable Sleeving Part Number Description**

Example: SE 25 PFR-M R 0

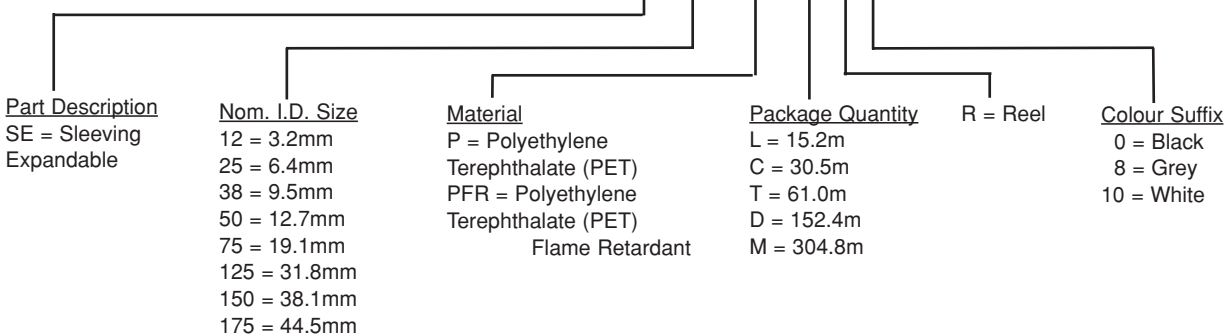

Part Number Black	Part Number Grey	Part Number White	Nominal I.D. mm	Nominal Diameter Range mm	Std. Pkg. Qty.* m	Std. Ctn. Qty.
SE12P-TR0	SE12P-TR8	—	3.2	2.4 to 6.4	61.0	4
SE12P-MR0	SE12P-MR8	SE12P-MR10			304.8	2
SE25P-TR0	SE25P-TR8	—	6.4	3.2 to 9.5	61.0	4
SE25P-MR0	SE25P-MR8	SE25P-MR10			304.8	2
SE38P-TR0	SE38P-TR8	—	9.5	4.7 to 14.3	61.0	4
SE38P-MR0	SE38P-MR8	SE38P-MR10			304.8	2
SE50P-CR0	SE50P-CR8	—	12.7	6.4 to 19.1	30.5	4
SE50P-DR0	SE50P-DR8	SE50P-DR10			152.4	2
SE75P-CR0	SE75P-CR8	—	19.1	12.7 to 31.8	30.5	4
SE75P-DR0	SE75P-DR8	SE75P-DR10			152.4	2
SE125P-LR0	SE125P-LR8	—	31.8	19.1 to 38.1	15.2	4
SE125P-TR0	SE125P-TR8	SE125P-TR10			61.0	2
SE150P-LR0	SE150P-LR8	—	38.1	25.4 to 57.2	15.2	4
SE150P-TR0	SE150P-TR8	SE150P-TR10			61.0	2
SE175P-TR0	—	—	44.5	31.8 to 69.8	61.0	2

*Order number of reels required.

PANDUIT™ Flame Retardant Braided Expandable Sleeving



- Provides continuous abrasion resistance for wires, cables and tubing
- Lightweight, durable protection
- Highly flexible open weave will not trap heat or humidity
- Rated for use up to 125°C
- Allows for use with irregular shapes
- Self extinguishing, meets UL VW-1
- Stock colours: Black or grey with white tracer, or in white with black tracer to identify flame retardant material



Part Number Black	Part Number Grey	Part Number White	Nominal I.D. mm	Nominal Diameter Range mm	Std. Pkg. Qty.* m	Std. Ctn. Qty.
SE12PFR-TR0	SE12PFR-TR8	—	3.2	2.4 to 6.4	60.1	4
SE12PFR-MR0	SE12PFR-MR8	SE12PFR-MR10			304.8	2
SE25PFR-TR0	SE25PFR-TR8	—	6.4	3.2 to 9.5	60.1	4
SE25PFR-MR0	SE25PFR-MR8	SE25PFR-MR10			304.8	2
SE38PFR-TR0	SE38PFR-TR8	—	9.5	4.7 to 14.3	60.1	4
SE38PFR-MR0	SE38PFR-MR8	SE38PFR-MR10			304.8	2
SE50PFR-CR0	SE50PFR-CR8	—	12.7	6.4 to 19.1	30.5	4
SE50PFR-DR0	SE50PFR-DR8	SE50PFR-DR10			152.4	2
SE75PFR-CR0	SE75PFR-CR8	—	19.1	12.7 to 31.8	30.5	4
SE75PFR-DR0	SE75PFR-DR8	SE75PFR-DR10			152.4	2
SE125PFR-LR0	SE125PFR-LR8	—	31.8	19.1 to 38.1	15.2	4
SE125PFR-TR0	SE125PFR-TR8	SE125PFR-TR10			61.0	2
SE150PFR-LR0	SE150PFR-LR8	—	38.1	25.4 to 57.2	15.2	4
SE150PFR-TR0	SE150PFR-TR8	SE150PFR-TR10			61.0	2
SE175PFR-TR0	—	—	44.5	31.8 to 69.8	61.0	2

*Order number of reels required.