

➤ **AM4002**

Intel® Pentium® M - based AdvancedMC Module



powered by
Intel® Pentium® M

AdvancedMC

- **Ultra Performance**
Up to 2.0 GHz Intel® Pentium® M processor 760
- **Ultra Capacity**
Up to 4 GB memory DDR2 400 MHz
- **Ultra Flexibility**
Flexible Gigabit and PCI Express fabric interface

AdvancedMC™**AdvancedTCA®****μTCA™**



First class performance AMC module

Kontron's AdvancedMC processor module AM4002 provides outstanding performance in conjunction with comprehensive AMC interconnect capabilities designed according to the PICMG specifications AMC.0, AMC.1, AMC.2, AMC.3.

Ultra Performance

The AM4002 is a highly integrated CPU board implemented as a single, Full- or Mid-size processor Advanced Mezzanine Card (AMC) module. The design is based on the low-power, high-performance Intel® Celeron® M or Pentium® M processors combined with the high-performance E7320 and 6300ESB server-class chipsets. The board supports Intel® Celeron® M and Pentium® M processor versions in 90 nm technology and 479 µFCBGA package with frequencies ranging from **1.0 GHz up to 2.0 GHz** providing front side bus speeds of 400 MHz and 533 MHz.

Ultra Capacity

The board includes a dedicated memory module for up to **4 GByte** registered Double Data Rate (DDR2) memory with Error Checking and Correcting (ECC) running at 400 MHz. An onboard soldered Flash up to **2 GByte** ensures enough space for embedded application code.

Ultra Flexibility

Supporting the PICMG sub-specifications AMC.1/.2/.3 the AM4002 ensures a comprehensive set of interconnecting capabilities to the AMC Carrier. A x4 PCI Express lane according to AMC.1 guarantees high throughput for I/O intensive applications. The dual Gigabit Ethernet controller realizing the AMC.2 interconnect utilizes a x4 lane PCI Express interface to the E7320 chipset ensuring maximum packet performance. Two SATA ports compliant to AMC.3 allow flexible usage models of the AM4002 depending on the application requirements.

Professional Support

For test purposes and first evaluation steps Kontron offers a complete evaluation kit for the AM4002 the AM-EVAL1. The



evaluation kit includes s/w support and all accessories needed to run the AM4002.

AMC everywhere


A comprehensive range of 'AMC everywhere' ATCA boards, such as ATCA carrier boards, CPU and hub boards are complementing Kontron's AMC product portfolio including the AM4002 module. Optimized for high-performance, packet-based telecom systems, the AM4002 is targeted towards, but not limited to telecom applications such as radio network controllers, storage control, routing and switching solutions in ATCA systems. Beyond the usage in ATCA systems the AM4002 complies to the newly specified µTCA standard dedicated for cost optimized communication applications.

Reliability

The careful design and selection of high temperature resistant components together with the elaborated heat sink construction ensures a high product availability. This, along with a high level of scalability, reliability, and stability, makes this state-of-the-art product a perfect core technology for long-life embedded applications.

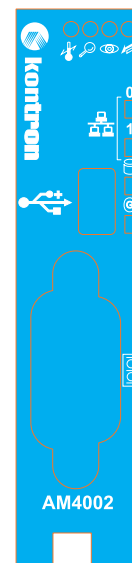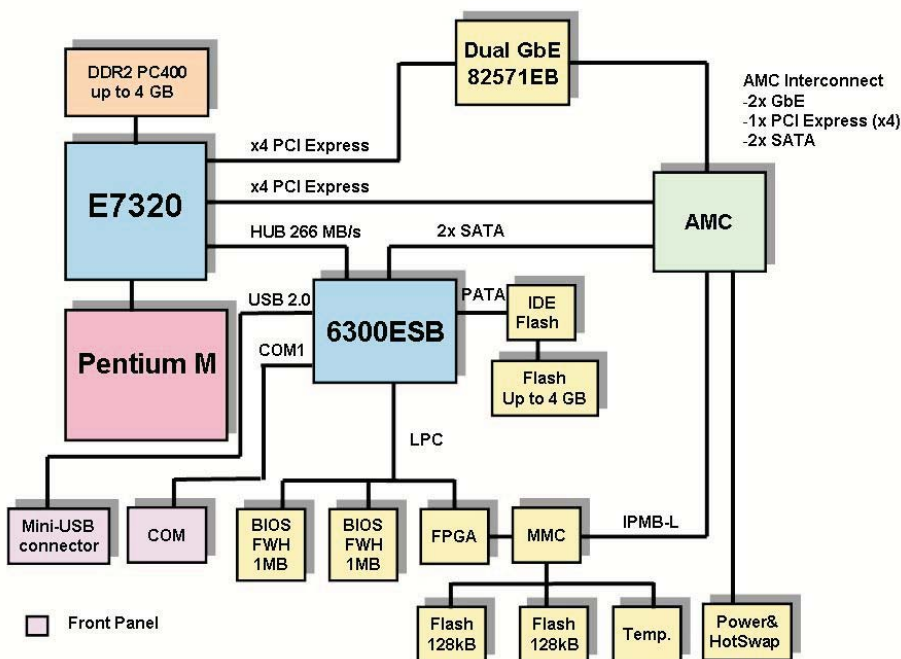

Mid-size front panel

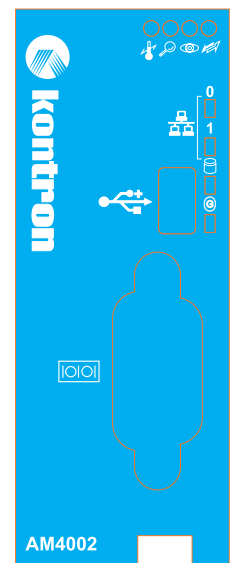

Full-size front panel

► Specification

System Processor

Intel® Celeron® M and Pentium® M Processor (90 nm), 479-pin µFCBGA package, 2x 32 KB L1 cache and 1/2 MB L2 cache, 400 or 533 MHz processor system bus.
 For Mid-size AM4002:
 - Celeron M 373 UL, 1.0 GHz ultra low voltage, 1 MB L2 cache, FSB 400 MHz ¹⁾
 - Pentium M 738 LV, 1.4 GHz (low voltage), 2 MB L2 cache, FSB 400 MHz
 - Pentium M 745, 1.8 GHz, 2 MB L2 cache, FSB 400 MHz
 For Full-size AM4002 with extended heat sink:
 - Pentium M 760, 2.0 GHz, 2 MB L2 cache, FSB 533 MHz ¹⁾
 The processor is passive cooled with a fanless heatsink. Forced air cooling at a specific flow rate is required.
¹⁾ available on project request only

Memory

System memory: Up to 2 GByte registered DDR2 400 MHz memory with ECC on dedicated memory module (4 GByte when 1 Gbit memory chips available)
 Flash: Soldered, up to 2 GByte via onboard IDE Flash controller for application code
 Flash (BIOS): Two redundant 1 MB Firmware hubs (FWH)
 EPROM: Serial EEPROM (24LC64) 64 kbit for CMOS data storing (no battery backup)

Onboard Controller

Memory Controller Hub: Intel E7320 chipset
 Two x4 PCI Express ports, DDR2 memory controller with RASUM features such as ECC, retry on uncorrectable error, integrated memory scrub engine, memory sparing function
 I/O Controller Hub: Intel 6300ESB chipset
 SATA 150, PATA 100, USB 2.0, UART, RTC, Interrupt Controller, Timer
 Gigabit Ethernet: Intel 82571EB dual Gigabit Ethernet PCI Express bus controller
 Watchdog: FPGA based Software configurable two-stage Watchdog with programmable timeout ranging from 125 msec to 256 sec in 12 steps.
 MMC: Microcontroller with dual 128 kB Flash and 4 kB RAM

AMC System Interconnect

PCI Express: One x4 PCI Express interface
 AMC fat pipes region port 4-7 (root complex)
 Gigabit Ethernet: Two Gigabit Ethernet 1000BASE-BX (SerDes) ports
 AMC common options region port 0-1
 Serial ATA: Two Serial ATA 150 ports
 AMC common options region port 2-3

Front Panel Interfaces

USB interface: One USB 2.0 host port on 5-pin MiniUSB type A/B connector
 One COM port on 9-pin Dsub connector
 LEDs:
 Light pipe:
 LED 0 (blue): hot swap
 LED 1 (red)
 LED 2 (green): general purpose or over temperature
 LED 3 (amber): general purpose or watchdog
 Four general purpose LEDs (debug LEDs for POST code)
 Alternatively used:
 LED 0/1: Ethernet port 0/1 link signal
 LED 2: SATA / Flash activity (application code)
 LED 3: MMC Debug LED

MMC Module Management Controller

Microcontroller with 4 kB RAM:
 - Two redundant 128 kB flash chips (one internal, one external)
 - Communication capabilities:
 Keyboard Controller Style (KCS) interface to the onboard processor, local Intelligent Platform Management Bus (IPMB-L) to the carrier serial debug interface for test purposes
 - Comprehensive MCC monitor/control support:
 Processor and chipset supervision such as:
 Reset Board
 Flash fail-over mechanism
 Monitor BIOS POST code
 Onboard Power Supply Supervision such as:
 AMC payload power
 AMC management power
 Various onboard supply voltages
 Temperature control for processor, board, chipset, GbE controller

Compliance

- PICMG AMC.0: Advanced Mezzanine Card Specification R2.0
 - PICMG AMC.1: PCI Express and Advanced Switching R1.0
 - PICMG AMC.2: Gigabit Ethernet R1.x
 - PICMG AMC.3: Storage Interfaces R1.x
 - IPMI Intelligent Platform Management Interface Specification, V1.5

 - EMC Directive 89/336/EEC, EN 55022, EN 55024 (Europe)
 - EN 300 386

 Designed to meet:
 - FCC 47 CFR Part 15, Subpart B (USA)
 - CISPR22
 - VCCI (Voluntary Japan Electromagnetic Compatibility requirement)
 - UL 60950, 3rd edition (US and Canada)
 - EN 60950-1 (Europe)
 - LVD 73/23/EEC (Europe)
 - Denan Law (Japan Safety)

Power Consumption

1.4 GHz, 1 GB mem: typ. 24 W, max. 28 W
 1.8 GHz, 2 GB mem: typ. 34 W, max. 40 W

General

Dimensions: 181.5 mm x 73.5 mm
 Single-width, full-height, extended full-height
 MTBF: 216,209 h acc. Bellcore Issue 6, Ground Benign, Controlled, 30°C

Software Support

AMI BIOS, BIOS parameters saved in EEPROM, Boot order defined via MMC
 Serial over Lan, Support for Linux CGL

Environmental

Operating temp.: -5°C to +55°C (depending on system environment)
 Storage temp.: -55°C to +85°C
 Humidity: Operational: 5%-90% (non-condensing)
 Non-Operating: 5%-95% (non-condensing)





► AM-EVAL1 - Evaluation Kit for AM4002

- Two copper RJ45 Gigabit Ethernet connectors for 1000 Base-TX support
- One standard PC PCI-Express x16 connector
- Two SATA connectors
- ATX power supply
- 3.5" SATA hard disk
- PCI-Express graphic board

➤ Ordering Information

Product	Description	
	Processor AMC	
AM4002-1.4-1M-1F	AMC processor module, Pentium M 1.4 GHz, 1 GB memory, 1 GB MB flash	
AM4002-1.4-2M-1F	AMC processor module, Pentium M 1.4 GHz, 2 GB memory, 1 GB MB flash	
AM4002-1.8-2M-2F	AMC processor module, Pentium M 1.8 GHz, 2 GB memory, 2 GB MB flash	
	Software	
KIT-AM4002	User's Manual, Tool-Kit	
LIN-BSP-AM4002	Linux Board Support Package	
	Accessories	
CABLE-MINI-USB-TA	Cable, MiniUSB-A-to-USB-A-Jack, 0.15m for AM4001 USB port to connect USB devices (included in AM-EVAL1)	
AM-EVAL1	AM4002 Evaluation Kit, including graphic card, HDD, cables, installed Linux s/w on HDD	

➤ AM4002 Platforms

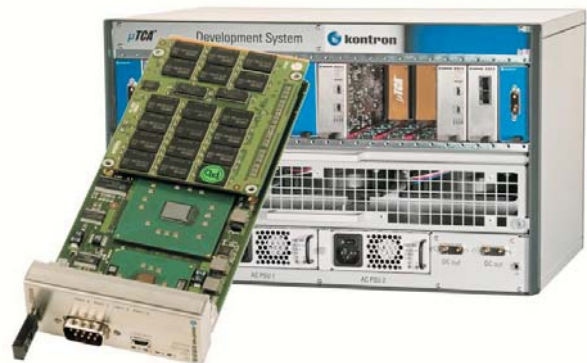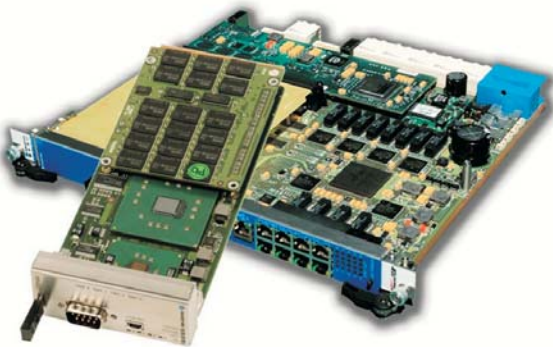

➤ Corporate Offices

US/ Canada
 14118 Stowe Drive
 Poway, CA 92064-7147
 Tel.: +1 (0)888-294-4558
 Fax: +1 (0)888-677-0898

sales@us.kontron.com

Europe, Middle East and Africa
 Oskar-von-Miller-Str. e 1
 85386 Eching/Munich Germany
 Tel.: +49 (0)8165-770
 Fax: +49 (0)8165-77219

sales@kontron.com

Asia Pacific
 4F, No. 415, Ti-Ding Blvd. Sec. 2
 Nei Hu District, Taipei 114, Taiwan
 Tel.: +886-2-29103532
 Fax: +886-2-29103582

sales@kontron-asia.com

Kontron Modular Computers GmbH
 Sudetenstr. 7
 D-87600 Kaufbeuren
 Tel.: +49 (0) 8341 803 0
 Fax: +49 (0) 8341 803 499

sales@kontron.com

Our worldwide sales representatives and partners can be found on our websites: www.kontron.com or www.kontron-emea.com