
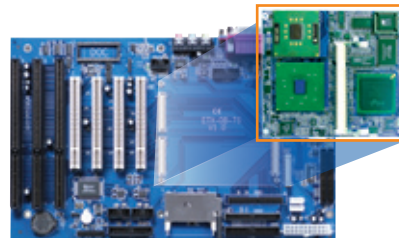


IEM-DB-7S-R20

ETX Baseboard

Full Function ETX Baseboard with LCD/CRT VGA, Audio, DOC, CF II & D I/O

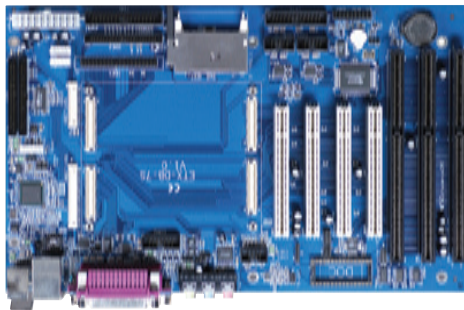

IEI IEM Customization Flow



Specifications

CPU Module Interface	ETX Form Factor
LCD Connector Slot	1 x 20-pin 24bit DFP for LVDS 1 x 30-pin 48bit DFP for LVDS 1 x 44-pin for 24bit TTL 1 x 44-pin for 18bit TTL
LCD Connector Slot	4 x PCI, 3 x ISA
Ethernet Chip	(IEM-DB-7S-R20)N/A (IEM-DB-7SR) Realtek 8100BL
SSD	CompactFlash Type II socket
Audio	A'97
Ethernet Connector	1 x RJ-45
RS232	3
RS232,422,485	1
KB/MS	2
LPT	2
VGA	1
USB	4
IDE Connector	2
FDD	1
DOC	1
DIO	4 inputs, 4 outputs
IR connector	5 pin-header
Video Capture Chip	N/A
Video Capture Connector	N/A

Packing List

- 1 x ETX-Baseboard single board computer
- 1 x FDD cabel (P/N: 32200-000017)
- 1 x HDD cable (P/N: 32200-000052)
- 1 x RS232/422/485 cable (P/N: 32200-000063)
- 1 x Mini jumper pack
- 1 x User manual

Ordering Information

Part No.	Description
IEM-DB-7S-R20	ATX Size 7 Slots ETX Baseboard w/o Realtek 8100BL LAN

Dimension

