



Open Frame Switching Power Supply

SSF-060 Series

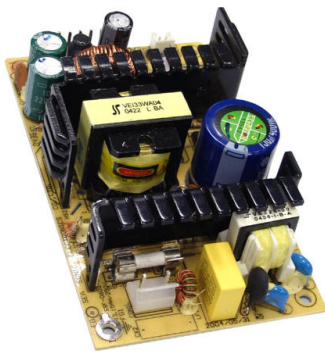

www.seasonic.com



Applications:

- Networking
- Data communication
- Peripheral equipment
- Compact equipment
- Terminal equipment
- Microcomputer

Features:

- Universal input
- Built-in Class B EMI filter
- Remote sense output
- Over voltage protection
- Over power protection
- Short circuit protection
- Thermal protection
- Option AC socket and switch
- Forward converter design

Output Specifications:

Model	Output power	Output Voltage	Maximum Current	Dimension(mm)
SSF-0601-1	43W	3.3V	13A	L127 x W76.2 x H33
SSF-0601-3	50W	5A	10A	
SSF-0601-5	50W	12A	4.2A	
SSF-0602-1	53W	3.3A	13A	
		5A	2A	

Dimension:

L127 x W76.2 x H33 mm

General Specifications:

- Input voltage range: 90~264 Vac
- Input frequency: 47~63 Hz
- Inrush current: 30A/60A max.
- Hold up time: 12-20 mS typical.
- Efficiency: 65~75% typical.
- Leakage current: 1mA typical.
- Line regulation: 1% typical.
- Load regulation: 2~4% typical.
- MTBF: 100K hours typical

Safety: CB, CUL, TUV, CCC

EMC: CE, FCC

Specification may change without prior notice

Sea Sonic Electronics Co., Ltd.
www.seasonic.com
sales@seasonic.com.tw
Tel: +886 2 2659 0338
Fax: +886 2 2659 0530

Seasonic Electronics Inc.
www.seasonicusa.com
usa@seasonic.com
Tel: +1 626 969 9966
Fax: +1 626 969 9986

Sea Sonic Europe B.V.
europe@seasonic.com
Tel: +31 (0)10-2262131
Fax: +31 (0)10-2519947

