


RMMDU 11/24 output relay IN: 24 VDC - OUT: 250 VAC/DC / 8 A

1 relay; 1 C/O contact
8 A
24 V DC
with minus plug link

Image

- Safe separation (IEC 61140/EN 61140)

Vicarious picture

Switching capacity according to (EN 60947)

24 V	AC12;8 A	AC15; 3 A	DC13; 2,5 A
230 V	AC12;8 A	AC15; 3 A	DC13; 0,3 A

Switching capacity (EN 60947-5-1)

AC-15	AC12;
-------	-------

Input

Input voltage	24 V DC $\pm 10\%$
Mounting power	17 mA
Plug link	Art.-No. 90960 (included)
LED display	LED (red)

Output

Switching voltage	max. 250 V AC/DC
Switching current	max. 6 A
Min. load current	100 mA
Breaking capacity (voltage dependent)	max. 2000 VA/240 W
Switching frequency	max. 10 Hz
Contact material	Ag Ni 0.15 hv; Ag hv
Energize/release/contact bounce time	10/15/2 ms

General data

Mech. / elect. life	2×10^7 /load dependent
Test isolation voltage	5 kV
Temperature range	-20...+50 °C
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Dimensions H \times W \times D	82 x 12 x 68 mm

Commercial data

Net weight	40
Weight unit	gram
Basic unit	pc.
Customs tariff number	85364900
Unit (piece)	1
Limited value	1


Comments

Safe separation (IEC 61140/EN 61140)

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 11/12

Circuit diagram

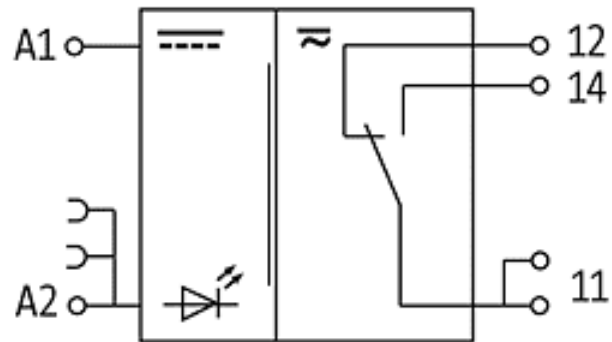

Dimension drawing

