


Up to 14 Slots

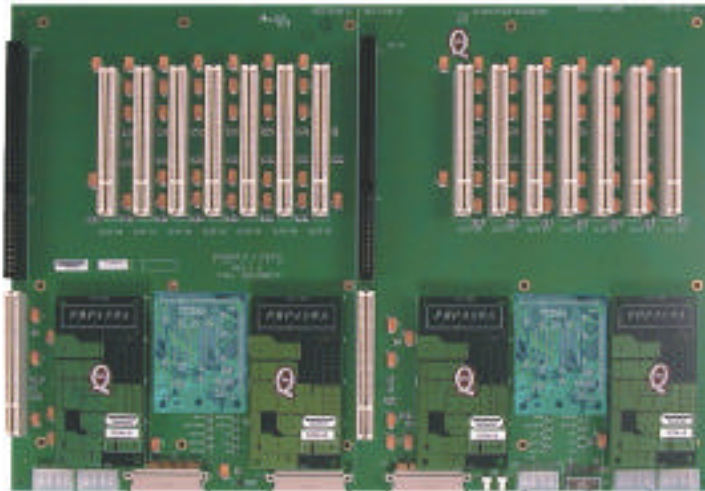

- 10 Layer Board Design
- Voltage Indication LEDs
- Flame Rated PCB At 94-V0
- Backplane Bus Connectors On .8" Centers
- Filter Capacitors (15uF, 25V) On all Supply Voltages
- Supports 2 CPUs
- (4) PBP4SWAs Allows Power to be Shut Off to Specific Segments
- DTI's CFI104 Card Controls the Power Switching for Each Segment

SPECIFICATIONS:

- A. (12) .156" Diameter Mounting Holes
- B. Remote Sense Connector - 2 Pin Friction Lock Header (AMP 640456-2)
- C. (4) Disk Drive Power Connectors (Molex 15-24-4049) - Mate (15-24-4048)
- D. (4) PBP4SWA Daughter Cards Needed
(2) PPC002 PCI Bridge Cards Needed
- E. (2) Fan Power Connectors - 2 Pin Friction Lock Header (AMP 640457)
- F. (3) High Current ERNI Power Connectors
- H. (2) Host CPU Slots (PICMG)
- I. (14) PCI Slots, 7 per segment
- J. (1) CFI104 Card Input Connector
- K. (1) Unswitched Drive Power Connector

