


BPF-3307

7" Fanless Panel PC with Touch Screen, +12V~+24V DC In
Provides Intel® Atom™ processor 1.6GHz, 2W AMP Stereo Speaker

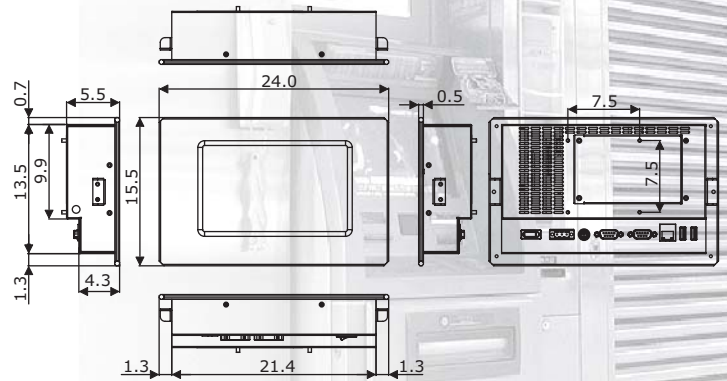

Features

- Fanless, aluminum front panel design
- 7" TFT color panel display
- Built-in touch screen, HS-3658+Intel® Atom™ N270 processor 1.6GHz, +12V~+24V DC in
- Onboard graphics, GB ethernet, audio controller
- 1 x 2.5" SATA HDD space
- Provides 2W AMP with Stereo Speaker
- Provides CF, 1 x mini PCI, 1 x mini PCIe x1, 2 x COM, 2 x USB2.0

System

SBC Model

HS-3658

CPU

Intel® Atom™ N270 processor 1.6GHz

BIOS

Award PnP Flash BIOS

System Chipset

Intel® 945GSE/ICH7-M

System Memory

1 x 200-pin SO-DIMM socket DDR 533MHz up to 2GB

Display Chipset

Intel® 945GSE integrated Intel® GMA950

Audio Chipset

RealTek ALC202A

2W AMP with Stereo Speaker

Ethernet Chipset

RealTek RTL8111C 10/100/1000 Mbps LAN

Drive Bay

1 x 2.5" SATA HDD space

Storage

1 x Type II CF socket

Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

Expansion Interface

1 x Type III Mini PCI socket

1 x Mini PCIe x1 socket

Dimensions (LxHxW)

24.0 x 15.5 x 5.5 cm

Cut Out Size (LxH)

21.8 x 13.9 cm

Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

EMC

FCC/CE

Front Panel Protection

IP65 compliance

Power In

+12V/2.1A~+24V/1.1A DC in

Display

LCD Size

7"

Max Resolution

800(H) x 480(V)

Brightness (cd/m²)

400 cd/m²

Contrast Ratio

400:1

Pixel Pitch (mm)

0.0635 x 0.1905

Back-light

LED

Touch Screen


7" resistive

I/O Interface

External I/O

PS/2 KB/MS, 2 x COM, LAN, 2 x USB2.0

Rear I/O

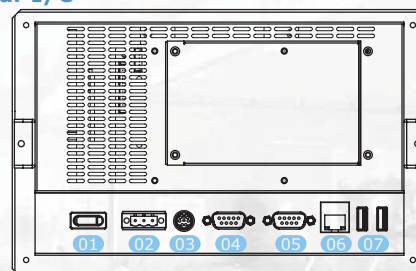

01. Power ON/OFF
02. DC In
03. KB/MS
04. COM 2
05. COM 1
06. LAN
07. USB2.0 * 2

Ordering Guide

BPF-3307-S

7" Panel PC w/TFT Panel, Touch Screen, Atom™ 1.6GHz CPU, +12V~+24V DC In

Accessory Options

Table Top Metal Stand, Memory Module, CF Module, 2.5" SATA HDD