


SOM-4780

Intel® Core™ Duo/Solo/Celeron® M
Processor SOM-XTX Module with CPU,
LVDS, Audio, LAN & PCIe

Coming Soon

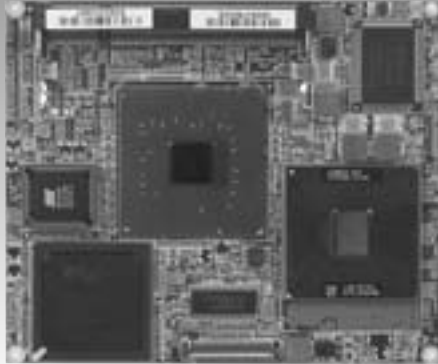

Specifications

- **CPU** Embedded Intel Core Duo/Solo/Celeron M Processor
 - **System Memory** 1 x 200-pin SODIMM sockets, Double Data Rate 2 (DDR2) 128 MB to 1 GB, DDR2 533/667 MHz
 - **2nd Cache Memory** 2 MB on Intel Core Duo/Solo Processor
 - **System Chipset** Intel 945 GM GMCH/ICH7-M Chipset 533/667 MHz FSB
 - **BIOS** AWARD™ 4 Mbit Flash BIOS
 - **WatchDog Timer** 256 levels timer interval, from 1 to 255 sec or min setup by software, jumperless selection, generates system reset
 - **Expansion Interface** Support PCI Express & PCI/LPC interface
- I/O**
- **PATA** 1 x EIDE (UMDA 100)
 - **SATA** 2 x SATA, data transfer rates up to 1.5 Gb/s (150 MB/s)
 - **USB** 6 x USB 2.0 compliant ports
 - **Audio** High definition audio interface (AC97/Azalia)
- Ethernet**
- **Chipset** Intel 82562
 - **Ethernet** IEEE 802.3u 10/100 Base-T compatible

Features

- Embedded Intel® Core™ Duo/Solo/Celeron® M Processor
- Intel 945GM integrated new generation graphic accelerator GMA 950
- Supports dual channel LVDS panel
- Supports PCIe x1 interface for high speed data transmission
- Supports up to six USB 2.0 / two COMs / two SATA / Audio / LAN

Display

- **Chipset** Intel 945GM Integrated Graphic Accelerator
- **Memory Size** DVMT 3.0 support; maximum memory allocation support is based on total system memory pre-allocated between 1 MB and 8 MB

Resolution

- **CRT Display Mode** Pixel resolution up to 1600 x 1200 at 85 Hz
- **LCD Display Mode** 18/36-bit LVDS panel support up to 1600 x 1200

Mechanical and Environmental

- **Dimensions (L x W)** 95 x 114 mm (3.74" x 4.5")
- **Power Supply Voltage** + 5 V power only
- **Power Requirement** 30 Watts @ 5 V
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F)
- **Operating Humidity** 0% ~ 90% relative humidity, non-condensing

1

System On Modules

2

Stackable SBCs

3

Single Board Computers

4

Slot CPU Cards

5

Industrial Motherboards

6

Embedded Box Computers

7

RISC-Based Evaluation Kit

8

Public Service Computers

9

Vehicle Mounted Computing Platforms

10

Medical Computing Platforms

11

Ubiquitous Computing

12

Display Solutions

13

Digital Signage

14

Portable Computing Platforms


15

Video Surveillance

16

Embedded Software Services

Board Diagram

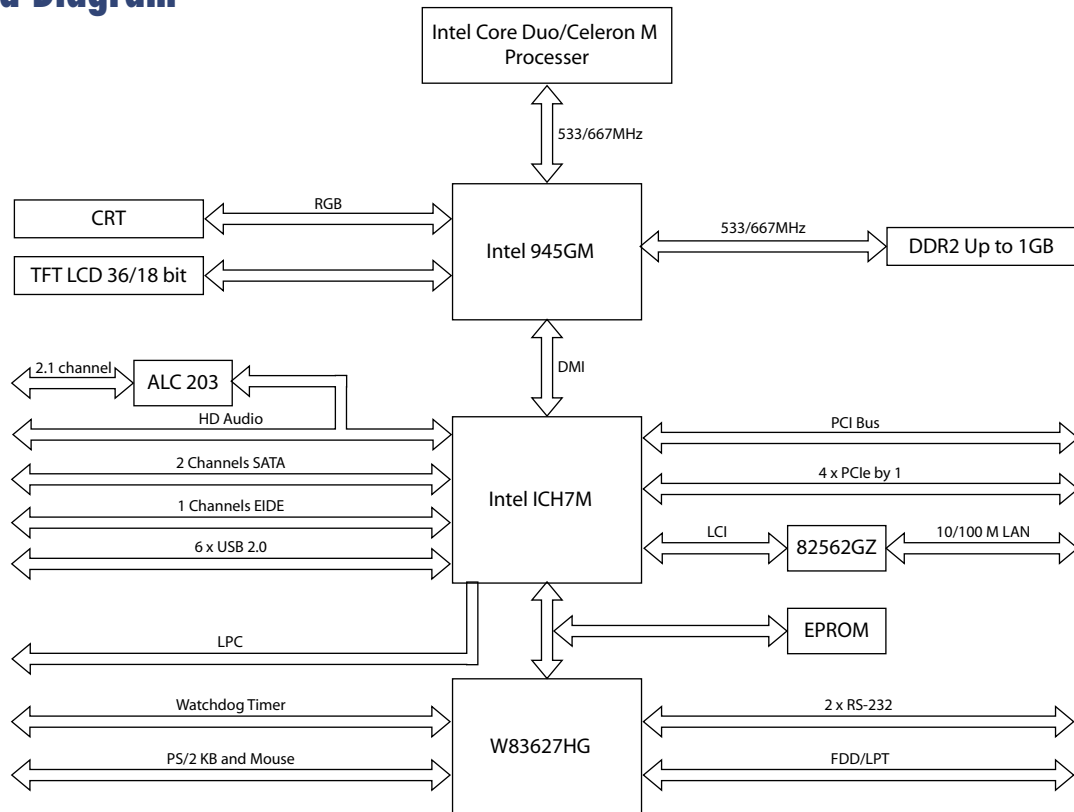

Ordering Information

Standard

Part No.	CPU
SOM-4780FL-0AA1E	Socket 478
SOM-4780FL-S0A1E	Intel Celeron M ULV 423 @ 1.06 GHz
SOM-4780FL-S7A1E	Intel Core Duo L2400 @ 1.66 GHz
SOM-4780FL-U0A1E	Intel Core Duo T2500 @ 2.0 GHz