




## MB740

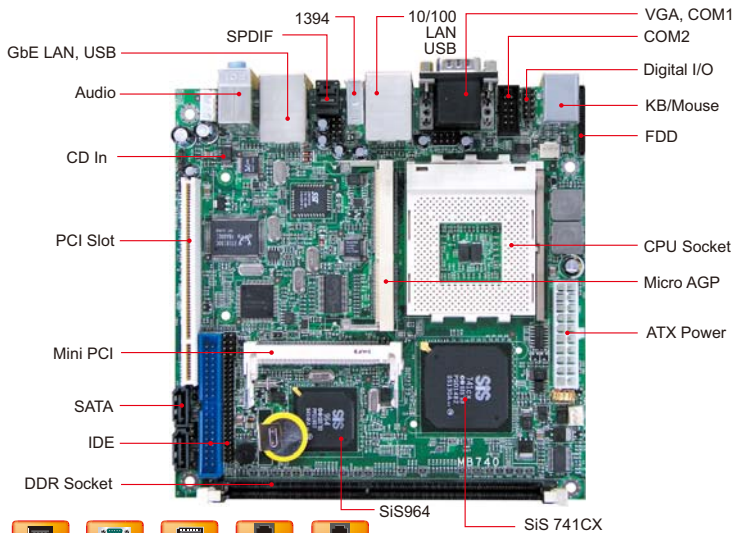

### Features

- Socket A for AMD Geode NX processors  
Up to 1.4GHz speed, 133MHz FSB
- 1x DDR DIMM, Max. 1GB, DDR266/333
- Onboard 10/100 and Realtek 8110S Gigabit LAN
- Integrated SiS 741CX CRT VGA, optional LVDS
- 2x SATA, 6x USB 2.0, 2x COM, Watchdog timer
- 1x PCI slot, 1x Mini PCI slot, optional 1394
- Optional TV-out/TMDS or CRT2 MicroAGP card



### System

CPU	Socket A (462-pin) for AMD Geode NX, up to 1.4GHz
System Memory	1x DDR DIMM, Max. 1GB, DDR333
System Chipset	SiS 741CX + SiS 964
BIOS	Award
Watchdog Timer	256 levels
SSD	Optional CF socket (on solder side via IDE2)
H/W Monitor	Yes
Expansion Slot	1x PCI, 1x Mini PCI, 1x MicroAGP

### Graphics

VGA Controller	SiS 741CX integrated for CRT
VGA Memory	Shared memory Max. 64MB
Display Interface	Optional SiS 302LV MicroAGP card supports 18/24-bit dual channel LVDS or TV-out; Optional SiS 301 MicroAGP card supports TMDS interface or CRT2

### LAN

Controller	SiS 964 built-in 10/100 and optional Realtek RTL8110S-32 Gigabit LAN
Connector	RJ-45 on board

### Multi I/O

I/O Chipset	SiS 964, ITE 8705 IDE1 (UDMA33/66/100), IDE2 (44-pin UDMA33), 1x slim FDD, 1x KB, 1x Mouse, 2x RS-232, 2x SATA
USB	4 ports on board Pin header for 2 ports (USB 2.0)
Audio	SiS 964 built-in audio + AC97 codec, SPDIF support 2W+2W volume amplifier
Others	Optional 1394, ATX power connector

### Mechanical and Environmental

Dimensions	170mm x 170mm (6.7" x 6.7")
Max. Power Requirement	AMD Geode NX 1GHz w/ 512MB DDR +3.3V: 0.88A +5V: 3.11A +12V: 3.91A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90% (non-condensing)

### Ordering Information

MB740-R	Socket A, SiS 741CX, Mini-ITX w/ 10/100 LAN, SATA
MB740F-R	Socket A, SiS 741CX, Mini-ITX w/ 10/100 LAN, Gigabit LAN, 1394, SATA
IBA140-302-R	SiS 302LV MicroAGP card for dual-channel 18/24-bit LVDS or TV-out
IBA140-301-R	SiS 301 MicroAGP card for TMDS/DVI or CRT2
IP115	Riser card with 1x PCI (see page 24)
IP151-R	Riser card with 2x PCI (see page 24)
IP340	Riser card with 2x PCI (see page 24)
IP450-R	Riser card with 2x PCI (see page 25)
CM1203-180	Chassis for Mini-ITX, w/ 180W PSU, 3.5" HDD holder, 2x PCI-E (optional IP241, IP118-R riser card & iI/O LCM)
CM1203-250	Chassis for Mini-ITX, w/ 250W PSU, 3.5" HDD holder, 2x PCI-E (optional IP241, IP118-R riser card & iI/O LCM)

Remarks:  
\* Specifications are subject to change without prior notice.

Motherboards

1

Disk-Size SBCs

2

CPU Modules

3

PC/104 Plus

4

CPU Cards

5

AGP & MicroAGP

6

Embedded Systems

7

Network Security Appliance

8