


ROCKY-3722EVS

ROCKY-3782EVS


Dual Socket-370 Base CPU Card With Dual 10/100Mbps Ethernet, VGA & Ultra160 SCSI

Socket-370 Base CPU Card With Dual 10/100Mbps Ethernet, VGA, Audio & Ultra160 SCSI

SBC

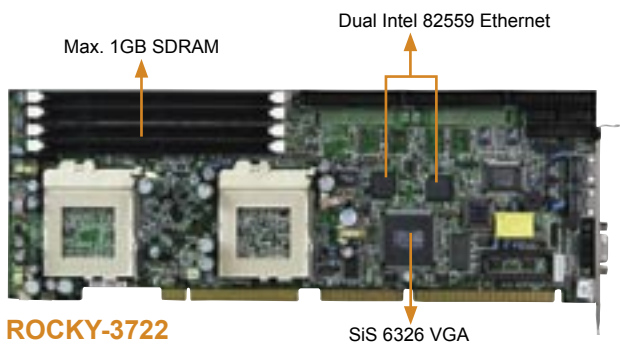

ROCKY-3722

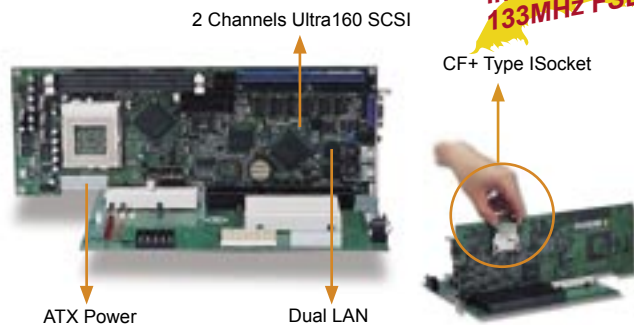

ROCKY-3782

Intel® 810E chipset
133MHz FSB

SPECIFICATIONS

ISA PLUS™

- ◆ CPU : Dual Socket 370 base support Celeron® (P-PGA)/ Pentium® III (FC-PGA) CPU up to 100MHz FSB
 - ◆ BIOS : Award BIOS
 - ◆ System Chipset : Intel® 440BX
 - ◆ System Memory : 4 x 168-pin DIMM sockets up to 1GB SDRAM
 - ◆ Display :
 - Chip : SiS 6326
 - V-RAM : 4MB
 - Resolution : 1600 x 1200 (256 colors)
 - Connector : DB-15 for CRT display
 - ◆ Ethernet : Two Intel 82559 10/100Mbps Ethernet chips with RJ-45 connectors, support AOL & WOL function
 - ◆ SSD : One DiskOnChip™ socket
 - ◆ I/O :
 - 2 x RS-232 serial port (16C550 UARTs compatible)
 - 1 x parallel port (SPP/EPP/ECP)
 - 2 x USB 1.1 (Pin header)
 - 1 x IrDA (SIR)
 - 1 x FDD port, support 1.44MB, 2.88MB, 3-mode function
 - 2 x ATA-33 IDE channels
 - ◆ SCSI Controller :
 - Chip : SYMBIOS® 53C1010
 - Interface : 2 x Ultra160 SCSI (160MB/Sec.; 68-pin connector)
 - Drivers : Microsoft Windows NT, Windows 2000, Windows 95/98, Novell NetWare, SCO Openserver, SCO UnixWare, IBM OS/2, Linux and Sun Solaris
 - ◆ WDT: software programmable, support 1~ 255 sec. system reset
 - ◆ Hardware monitoring chip on board
 - ◆ ISA Plus™ : Designed to enhance the ISA bus drive capability
 - ◆ Supports ATX power control function
 - ◆ Power Consumption : +5V@8.5A, +12V@350mA, -12V@50mA (Dual Pentium III and 512MB SDRAM)
 - ◆ Operating Temperature : 0~60°C (CPU cooler required)
 - ◆ Relative Humidity : 5~95%, non-condensing
 - ◆ GW: 900g
- Note : ROCKY-3722EVS shipping with one U160-CB01 cable

SPECIFICATIONS

ISA PLUS™

- ◆ CPU : Socket 370 base support Celeron™ / Pentium® III up to 133MHz FSB
 - ◆ BIOS : Award PnP Flash BIOS
 - ◆ System Chipset : Intel® 810E
 - ◆ System Memory : Two 168-pin DIMM sockets up to 512MB SDRAM
 - ◆ PCI-ISA Bridge : ITE IT8888
 - ◆ Display : Integrated in 810E chipset with share memory architecture, max. resolution : 1600 x 1200 (256 colors)
 - ◆ Ethernet : Dual Intel® 82559 10/100Mbps Ethernet chips with two RJ-45 connectors, support AOL & WOL Function
 - ◆ SSD : One CompactFlash™ socket
 - ◆ Audio : AC'97 compliant Audio CODEC
 - ◆ I/O :
 - 2 x RS-232 serial port (16C550 UARTs compatible)
 - 1 x parallel port (SPP/EPP/ECP)
 - 2 x USB 1.1 (Pin header)
 - 1 x IrDA (SIR)
 - 1 x FDD port, support 1.44MB, 2.88MB, 3-mode function
 - 2 x ATA-66 IDE channels
 - ◆ SCSI :
 - Chip : SYMBIOS® 53C1010 Ultra160 SCSI chip
 - Transfer Rate : 160MB/Sec.
 - Connectors : Two 68-pin connectors
 - ◆ WDT: software programmable, support 1~ 255 sec. system reset
 - ◆ ISA Plus™ : Designed to enhance the ISA bus drive capability
 - ◆ Supports ATX power control function
 - ◆ Power Consumption : +5V@5A, +12V@200mA, -12V@50mA (Pentium® III 500MHz and 128MB SDRAM)
 - ◆ Operating Temperature : 0 ~60°C (CPU cooler required)
 - ◆ Relative Humidity : 5~95%, non-condensing
 - ◆ GW: 900g
- Note : ROCKY-3782EVS shipping with one U160-CB01 cable

Model	PCI 1	PCI 2	PCI 3	PCI 4
ROCKY-3782EVS	YES	YES	YES	NO
ROCKY-3782EV	YES	YES	YES	YES
ROCKY-3782V	YES	YES	YES	YES

ORDERING INFORMATION

- **ROCKY-3722EVS-R2**
PICMG bus dual Socket-370 base CPU card with 4MB VGA, dual 10/100Mbps Ethernet & Ultra160 SCSI
- **ROCKY-3722EV-R2**
PICMG bus dual Socket-370 base CPU card with 4MB VGA & dual 10/100Mbps Ethernet
- **ROCKY-3722V-R2**
PICMG bus dual Socket-370 base CPU card with 4MB VGA
- **U160-CB01** Internal Ultra160 SCSI cable
- **CB-U160EXT** External Ultra160 SCSI connector
- **CB-USB02** Dual ports USB cable with bracket

ORDERING INFORMATION

- **ROCKY-3782EVS**
PICMG bus Socket-370 base CPU card with VGA, dual 10/100Mbps Ethernet, Audio & Ultra160 SCSI
- **ROCKY-3782EV**
PICMG bus Socket-370 base CPU card with VGA, dual 10/100Mbps Ethernet & Audio
- **ROCKY-3782V**
PICMG bus Socket-370 base CPU card with VGA & Audio
- **U160-CB01** Internal Ultra160 SCSI cable
- **CB-U160EXT** External Ultra160 SCSI connector
- **CB-USB02** Dual ports USB cable with bracket