

IP-1K110* Reconfigurable FPGA Modules


This series of plug-in mezzanine modules provides a user-customizable FPGA on an Industry Pack (IP) module. The module allows users to develop and store their own instruction set in the FPGA for adaptive computing applications. Typical uses include specialized communication systems over RS422/485 networks, test fixture simulation of signals over TTL-switched lines, and analysis of acquired data using specialized mathematical formulas such as those developed with MathWorks's MatLab® software.

The FPGA on Acromag's IP-1K110 modules can control up to 48 TTL or 24 RS485 I/O signals or a mix of both types. User application programs are downloaded through the IP bus directly into the FPGA. A pre-programmed internal CPLD facilitates initialization by acting as the bus controller during power-up and while the program is downloading. This bus controller is limited to functions necessary for power-up and downloading. After the program downloads, the FPGA takes control of the IP bus and the CPLD is disabled.

Features

- Altera® EP1K100 FPGA
- Three models available:
 - IP-1K110-0024: 24 differential RS485 lines
 - IP-1K110-2412: 24 TTL lines and 12 RS485
 - IP-1K110-4800: 48 TTL lines
- FPGA programmable via the IP bus
- Local static RAM (64K x 16) under FPGA control
- Programmable PLL-based clock synthesizer
- Supports 8MHz and 32MHz IP bus
- User-programmable interval timer
- Example FPGA design code provided as VHDL
 - 8MHz IP bus interface
 - Digital I/O control register
 - others
- Hardware support for DMA and memory space

* Replaces IP-1K100 model for new designs. Current IP-1K100 customers consult factory for availability.

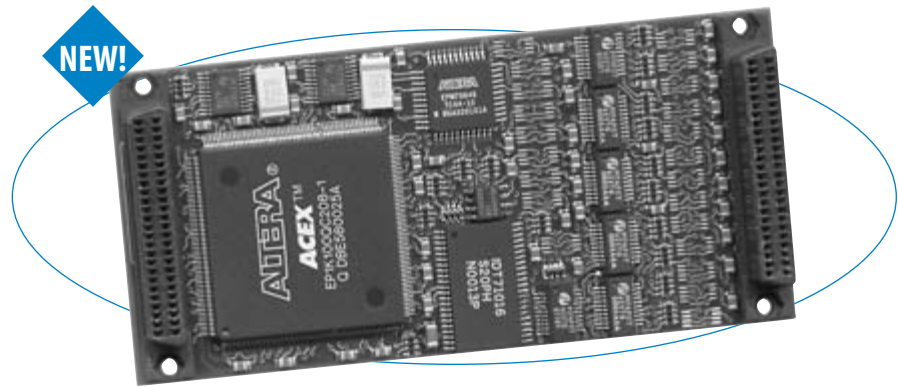

These modules support adaptive computing applications with an FPGA running custom programs to control system communication.

Specifications

FPGA

- FPGA: Altera EP1K100.
- FPGA configuration: Downloadable via IP bus.
- Clock: Programmable PLL-based clock synthesizer.
- Input/output signals:
 - IP-1K110-0024: 24 differential RS485 lines
 - IP-1K110-2412: 24 TTL lines and 12 RS485
 - IP-1K110-4800: 48 TTL lines
- IP bus clock frequency: Supports 8 and 32MHz clocks.
- ID space: 8-bit data.
- I/O space: 8 or 16-bit data.
- Memory space: Wired to FPGA but not supported with example FPGA design firmware.
- Interrupt support: Two IP request levels.
- DMA support: Wired to FPGA but not supported with example FPGA design firmware.
- IP logic interface: EPLD maintains ID space and two locations in IO space for FPGA configuration. Remaining IO space and INT space are defined by the configured FPGA.
- Example FPGA program: VHDL provided implements IP bus interface to IO, ID, and INT space. Requires user proficiency with VHDL and Altera MAX+PLUS® II or Quartus® software tools. See Engineering Design Kit.

IP Compliance (ANSI/VITA 4)

- Meets IP specifications per ANSI/VITA 4-1995.
- IP data transfer cycle types supported: Input/output (IOSel*), ID read (IDSel*), Interrupt select (INTSel*).
- Access times (8MHz or 32MHz clock):
 - ID space read: 0 wait states (250ns cycle).
 - Registers read/write: 1 wait states (500ns cycle).
 - Interrupt read/write: 0 wait states (250ns cycle).

Environmental

- Operating temperature: 0 to 70°C (IP-1K110) or -40 to 85°C (IP-1K110 E models).
- Storage temperature: -55 to 125°C.
- Relative humidity: 5 to 95% non-condensing.
- MTBF: 5,554,167 hrs. at 25°C, MIL-HDBK-217F, notice 2

Engineering Design Kit

- Engineering Design Kit: Provides user with basic information required to develop a custom FPGA program for download to the Altera FPGA. This kit must be ordered with the first purchase of a IP-1K110.
- Kit on CD-ROM includes:
 - Schematics (.pdf)
 - Parts List and Part Location drawing (.pdf)
 - Example VHDL Source File (.vhd)
 - Example Pin Definition File (.acf)
 - Example VHDL Object code (.hex)
 - Readme file (.txt)

Only one Design Kit purchase is required. User should be fluent in the use of Altera MAX+PLUS or Quartus design tools. Additionally, user should also purchase either the IPSW-API-VXW (VxWorks source code library) or the IPSW-ATX-PCI (ActiveX driver package). These programs include important driver support programs to assist in transferring developed code between user's processor and Altera 1K100.

Ordering Information

Industry Pack Modules

- IP-1K110-0024:** 24 differential RS485 lines
- IP-1K110-0024E:** Same as above with extended temperature range
- IP-1K110-2412:** 24 TTL lines and 12 RS485
- IP-1K110-2412E:** Same as above with extended temperature range
- IP-1K110-4800:** 48 TTL lines
- IP-1K110-4800E:** Same as above with extended temperature range
- IP-1K110-EDK:** Engineering Design Kit (one kit required)

For Industry Pack Carrier Cards, see Page 5.

Software (see Page 81)

- IPSW-API-VXW:** VxWorks® software support package
- IPSW-API-QNX:** QNX® software support package
- IPSW-ATX-PCI:** ActiveX®/OLE Controls 2.0 software
- IPSW-LINUX:** Linux™ support (website download only)

For accessories information, see Page 87.