


Key Features

1. Intel® Core™ 2, Quad and Duo Pentium® Dual-Core, Celeron® Dual-Core processors in LGA775 Package (FSB 1333/1066/800)
2. Intel® G41+ICH7 Chipset
3. Up to 4GB DDR3 1066/800 non-ECC Un-Buffered DIMM
4. Realtek 8111C Gigabit Ethernet Controller
5. 4x SATA (3.0Gbps) Ports +2 IDE devices support
6. 1 (x16) PCI-Express, 1 (x1) PCI-Express, 2x 32-bit PCI Slots
7. Realtek ALC888 7.1 HD Audio
8. 8x USB 2.0 Ports + 2 Serial Ports
9. HDMI + VGA Dual Display

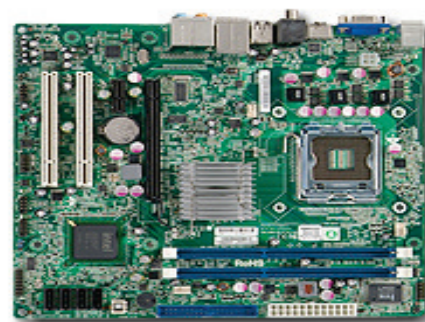

Processor / Cache

Processor	Intel® Core™ 2, Quad and Duo Pentium® Dual-Core Series in LGA775 Package
System Bus / QPI	Supports upto 1333/1066/800 FSB

Server Class

Rackmount/Tower Server Class

Chipset / Serverboard

Intel® G41 chipset

System Memory

Memory Capacity Supports up to 4 GB 1066 / 800MHz DDR3 non-ECC Un-Buffered memory

Expansion Slot

PCI-Express: 1 (x16) PCI-e slot, 1 (x1) PCI-e slot
 PCI: 2x 32-bit PCI slots

Integrated On-Board

SAS	-
SATA	Intel ICH7 SATA (3Gbps) Controller
Network Controller	Realtek 8111C Gigabit Ethernet Controller
Graphics	-
Infiniband	-

Input / Output

SAS / SATA Port	SATA: 4 Serial ATA ports
Floppy	-
LAN Port	1x RJ45 LAN port
USB Ports	4x USB rear ports, 2x USB internal header(4 ports) Total 8 USB 2.0 Compliant
VGA Port	-
Keyboard / Mouse	PS/2 keyboard and mouse ports
Serial Port/Header	2 Fast UART 16550 serial headers
Sound Port	8x analog outputs (7.1 HD)

India Authorized Distributor:

Mega Networks Pvt. Ltd. India	+9122 4155 8282	e-Mail: info@meganet1.com
	+9122 2562 8282	sales@meganet1.com
Meganet Technologies, Inc. USA	+1 302 261 5400	Web: www.meganet1.com

Corp. Office :

#507-508 Corporate Centre, Nirmal Lifestyle, L.B.S. Marg, Mulund (W), Mumbai - 400 080. India

Mumbai | Pune | Hyderabad | Ahmedabad | San Francisco

