


# HS-6300

## Dual Pentium II/III Slot 1 PICMG Bus SBC with CRT/Panel & LAN

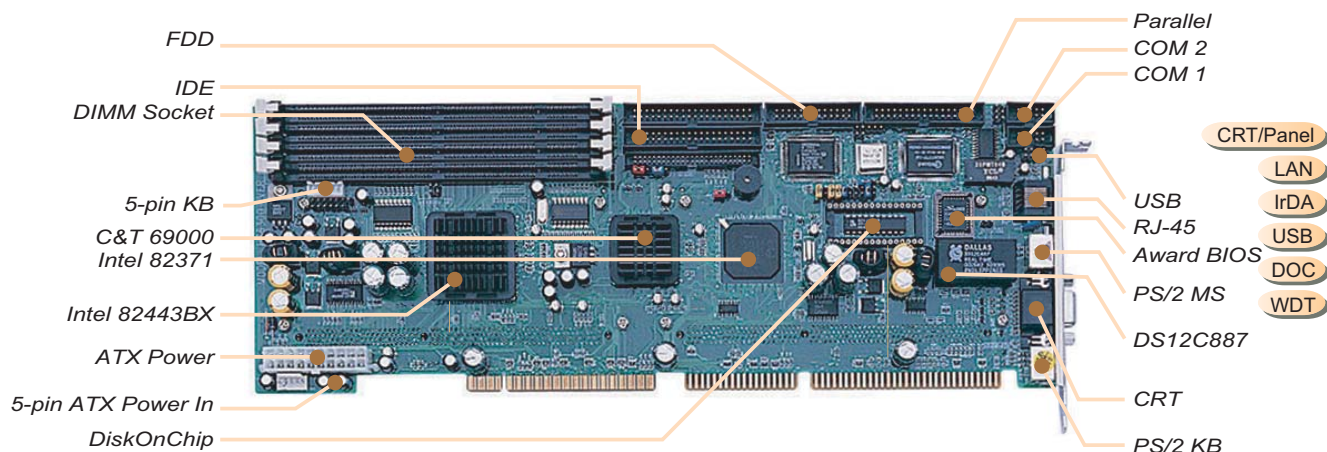

### Features

- ✔ Dual Pentium II/III 233~700MHz CPU
- ✔ Intel 82443BX/82371 system chipset
- ✔ Four DIMM sockets with a max. capacity of 1GB
- ✔ Winbond W83977 super I/O chipset
- ✔ Two RS-232 serial ports
- ✔ C&T 69000 CRT/Panel display controller
- ✔ Intel 82558 10/100 Based LAN
- ✔ DickOnChip socket supporting memory sizes of up to 288MB
- ✔ Supports ATX power function

### Specifications

- \* **CPU:** Dual Intel Pentium II/III 233~700MHz CPU
- \* **Bus Interface:** PICMG Bus
- \* **Memory:** Four DIMM sockets providing up to 1GB
- \* **Chipset:** Intel 82443BX/82371
- \* **I/O Chipset:** Winbond W83977
- \* **VGA:** C&T 69000 with 2MB memory supporting CRT/Panel displays up to 1280 x 1024 at 256 colors
- \* **IDE:** Four IDE disk drives supporting ATA/33 and with a transfer rate up to 33MB/sec
- \* **FDD:** Supports up to two floppy disk drives
- \* **Parallel:** One enhanced bi-directional parallel port supporting SPP/ECP/EPP
- \* **LAN:** Intel 82558 10/100 Based LAN
- \* **Serial Port:** 16C550 UART-compatible RS-232 x 2 serial ports with 16-byte FIFO
- \* **IrDA:** One IrDA TX/RX header
- \* **USB:** Two USB connectors
- \* **Keyboard:** PS/2 6-pin Mini DIN or 5-pin connector
- \* **Mouse:** PS/2 6-pin Mini DIN
- \* **DiskOnChip:** DiskOnChip socket supporting memory sizes of up to 288MB
- \* **BIOS:** Award PnP Flash BIOS
- \* **Watchdog Timer:** Sets 1, 2, 10, 20, 110, 220 seconds activity trigger with Reset or NMI
- \* **CMOS:** DS12C887 or equivalent device
- \* **DMA Channels:** 7
- \* **Interrupt Levels:** 15
- \* **Power:** +5V, +12V, -12V
- \* **Extra Power Connector:** One ATX connector
- \* **Maximum Power Consumption:** +5V@12A, +12V@120mA, -12V@50mA
- \* **Operating Temperature:** 0~60°C
- \* **Board Size:** 33.6 x 12.1 cm

### Ordering Guide

© HS-6300

Dual PII/PIII Slot 1 PICMG Bus  
SBC with CRT/Panel & LAN

Specifications are subject to change without notice.

The Industrial PC Authority



**BOSER Technology Co., Ltd.**

15F-6, No. 77, Hsin Tai Wu Road, Sec. 1, Hsichih, Taipei Hsien 221 Taiwan TEL : 886-2-26983333 FAX : 886-2-26983300  
<http://www.boser.com.tw> <http://www.isb.com.tw> E-Mail: webmaster@boser.com.tw

U.S.A. TEL : +1 650 4280868 FAX : +1 650 4281172	U.K. TEL : +44 1543 466552 FAX : +44 1543 466553	JAPAN TEL : +813 34248120 FAX : +813 34180521	FRANCE TEL : +33 1 69061790 FAX : +33 1 69433732	SHANGHAI TEL : 021 62789292 FAX : 021 62789393
GERMANY TEL : +49 221 954790 FAX : +49 221 9547988	KOREA TEL : +82 2 34737862 FAX : +82 2 34743120	ISRAEL TEL : +972 3 9203456 FAX : +972 3 9203535	FINLAND TEL : +358 2 6203753 FAX : +358 2 6203770	BEIJING TEL : 010 82660235 FAX : 010 82660241