


# DC/AC Inverter

150~2500W Modified Sine Wave

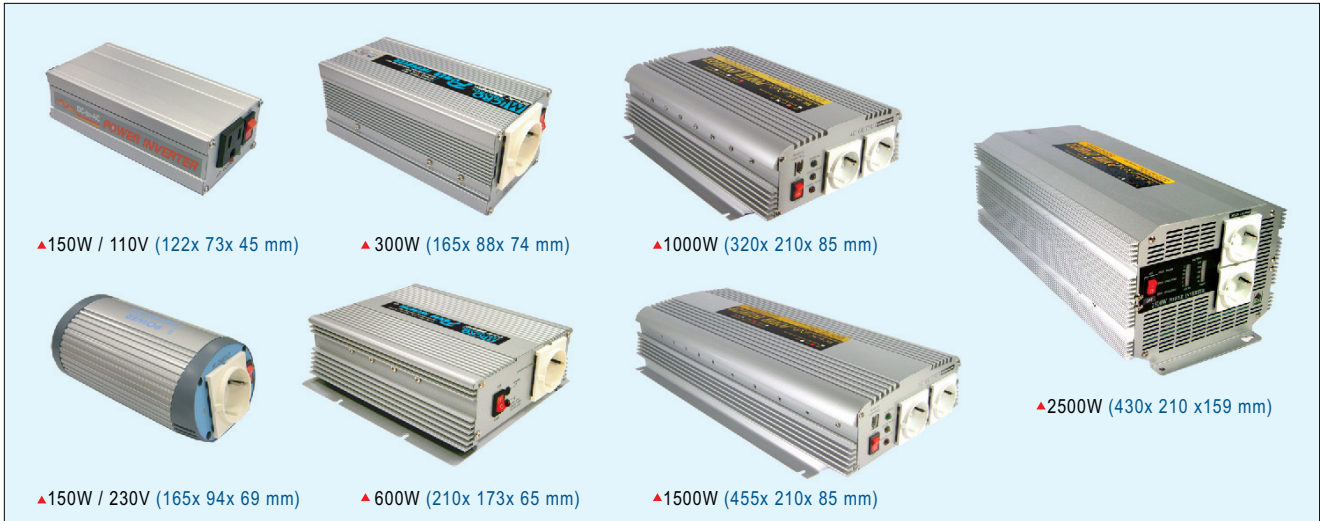

## Features

- Input Protections:
  - Polarity reverse /
  - Over and under voltage /
  - Low battery Alarm and shut down
- Onput Protections:
  - Short circuit / Overload / Over temp.
- With power ON/OFF switch and LED indicator
- Input and output fully isolation
- Low power consumption (standby)
- LVD meet EN60950 and e13 mark
- EMC meet EN61000-4-2,3, EN55022
- 1 year warranty

## Output socket (optional)

			◀ Please consult Mean Well for other kinds of optional output socket.
TYPE-2	TYPE-3	TYPE-4	
USA	EUROPE	UNIVERSAL	

## General Specification (Please refer to [www.meanwell.com](http://www.meanwell.com) for detail spec. )



<b>ORDER No.</b>	A301	A302
<b>DC input rated voltage</b>	12.5V	25.0V
<b>AC output voltage</b>	110VAC(rms) / 60Hz or 230VAC(rms) / 50Hz (optional)	
<b>Max. output power</b>	150W, 300W, 600W, 1000W, 1500W, 2500W (optional)	
<b>AC output regulation</b>	±10% rated output voltage	
<b>Bat. low alarm</b>	10±0.5V	20.5±1.0V
<b>Bat. low shut down</b>	9.5±0.5V	19.5±1.0V
<b>I/P over voltage protection</b>	15~17V	30~32V
<b>Working temperature</b>	0~30°C (0~25°C for 2500W)	
<b>LVD</b>	Compliance to EN60950-1, EN61558-1	
<b>EMC</b>	Compliance to EN55014-1, EN61000-3-2,3, EN61000-4-2,4,5,6,11	

## 150W

Order No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-150-B2	150W	10-15	110/60	TYPE-2	78%
A301-150-F3	150W	10-15	230/50	TYPE-3	78%
A302-150-B2	150W	21-30	110/60	TYPE-2	82%
A302-150-F3	150W	21-30	230/50	TYPE-3	82%

## 300W

Order No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-300-B2	300W	10-15	110/60	TYPE-2	82%
A301-300-F3	300W	10-15	230/50	TYPE-3	82%
A302-300-B2	300W	21-30	110/60	TYPE-2	85%
A302-300-F3	300W	21-30	230/50	TYPE-3	85%

## 600W

Order No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-600-B2	600W	10-15	110/60	TYPE-2	82%
A301-600-F3	600W	10-15	230/50	TYPE-3	82%
A302-600-B2	600W	21-30	110/60	TYPE-2	85%
A302-600-F3	600W	21-30	230/50	TYPE-3	85%

## 1000W

Order No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-1K0-B2	1000W	10-15	110/60	TYPE-2	82%
A301-1K0-F3	1000W	10-15	230/50	TYPE-3	82%
A302-1K0-B2	1000W	21-30	110/60	TYPE-2	85%
A302-1K0-F3	1000W	21-30	230/50	TYPE-3	85%

## 1500W

Order No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-1K7-B2	1500W	10-15	110/60	TYPE-2	82%
A301-1K7-F3	1500W	10-15	230/50	TYPE-3	82%
A302-1K7-B2	1500W	21-30	110/60	TYPE-2	85%
A302-1K7-F3	1500W	21-30	230/50	TYPE-3	85%

## 2500W

Order No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-2K5-B4	2500W	10-15	110/60	TYPE-2	82%
A301-2K5-F3	2500W	10-15	230/50	TYPE-3	82%
A302-2K5-B4	2500W	21-30	110/60	TYPE-2	85%
A302-2K5-F3	2500W	21-30	230/50	TYPE-3	85%