


48 PIN BGA SOCKET ADAPTER

Model : PA48BGA48DAD

These adapters connect the pins of a 48 ball BGA device to a 48 pin DIP equivalent.
They accept a BGA device and plug into a DIP socket.

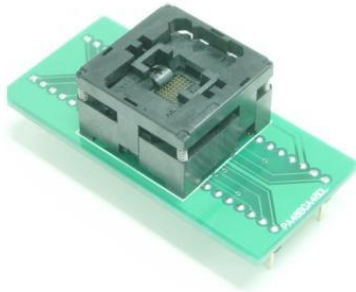

Order No.


► PA48BGA48DAD

Socket manufacture (MCS), Socket type (Open)

The PA48BGA48DL socket adapter accepts with the device family below :

SAMSUNG K8D3216UBC-T
SAMSUNG K8D3216UTC-T

The BGA socket accepts packages with the dimensions listed below :

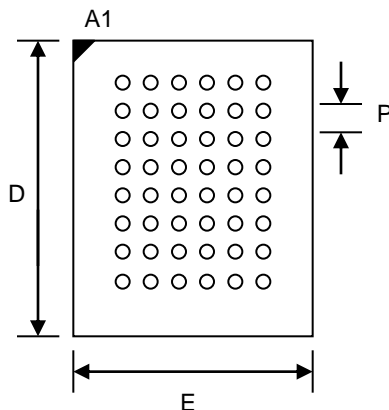

D	9.0 mm
E	6.0 mm
Pitch	0.8 mm

The following chart shows the connections from the BGA socket to the adapter's DIP plug.

BGA48	DIP48	DIP48	BGA48
D6	1	48	E6
C6	2	47	F6
A6	3	46	H6
B6	4	45	G6
D5	5	44	E5
C5	6	43	F5
A5	7	42	H5
B5	8	41	G5
D4	9	40	E4
D3	10	39	F4
A4	11	38	H4
B4	12	37	G4
C4	13	36	G3
B3	14	35	H3
A3	15	34	F3
C3	16	33	E3
B2	17	32	G2
A2	18	31	H2
C2	19	30	F2
D2	20	29	E2
B1	21	28	G1
A1	22	27	H1
C1	23	26	F1
D1	24	25	E1