
CYCLOPS-B Series

Technical Drawing

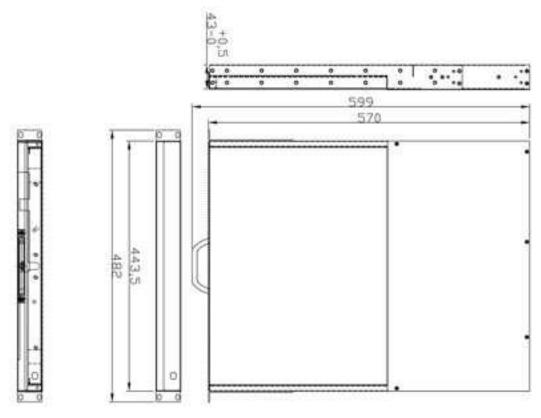

Construction

Heavy Duty steel

Color

Black

Panel

15"LCD monitor with 200 nits brightness. Optional 17" LCD Available

KVM Switch

DB15 type female connectors for connection (VGA, PS/2 keyboard and PS/2 mouse male connectors at the platform side) Port selection through hot keys, or On Screen Display. Cascading up to 512 systems. Password function for extra security. Available in 8 or 16 ports.

Keyboard and Mouse

PS/2 106 keys keyboard with industrial keyboard or optional Cherry keyboard with trackball.

On Screen Control

Auto adjustment, brightness, contrast, phase, H-V position, frequency, size, and display mode. Automatic and Manual Scan mode.

Security Lock

Front access lock for system security.

Drawer Design

Full extension high load rating slide rail. Total drawer travel distance 385mm. Two separate tracks for panel and keyboard enables independent extraction of either panel or keyboard.

Dimensions

445(W) x 570(D) x 44(H) mm / 17.7" x 22.7" x 1.75"

Operating Temperatures

0~40 ℃

Gross Weight

16.5 kg

Ordering Information

Ordering informa	ITION
CYCLOPS-B158	15" 8-port KVM, with Touchpad.
CYCLOPS-B158C	15" 8-port KVM, Cherry Keyboard and Trackball
CYCLOPS-B178	17" 8-port KVM with Touchpad.
CYCLOPS-B178C	17" 8-port KVM, Cherry Keyboard and Trackball
CYCLOPS-B1516	15" 16-port KVM with Touchpad.
CYCLOPS-B1516C	15" 16-port KVM, Cherry Keyboard and Trackball
CYCLOPS-B1716	17" 16-port KVM with Touchpad.
CYCLOPS-B1716C	17" 16-port KVM, Cherry Keyboard and Trackball
HBD-1601P	PS2 KVM Cable, 1.8M length, for Cyclops B Series (See note below)
HBD-1603P	PS2 KVM Cable, 3.0M length, for Cyclops B Series

Note: One HBD-1601P included in all Cyclops-B Series