

# BPF-3217-Y

17" Fanless Panel PC with Touch Screen, V4 Eden, 2W Stereo Speaker, TV-Out, 4 COM, 1 USB, 12V DC Adapter

Panel PC



## Features

- » Fanless, aluminum front panel design
- » 17" TFT color panel display w/resistive or SAW touch screen
- » VIA V4 Eden processor
- » VGA, dual Ethernet, Audio port
- » 2W Stereo Speaker
- » TV-Out function
- » 1 x 2.5" HDD space, 1 x slim CD-ROM space
- » 1 x CF socket
- » 4 x COM port, 1 x USB2.0 port
- » 12V DC adapter
- » Option for Wireless LAN module

## System

### LCD

Size: 17"  
Max. Resolution: 1280 x 1024 pixels  
Brightness: 300 cd/m<sup>2</sup>  
Contrast Ratio: 800:1  
Max. Color: 16.7M colors/RGB 6-bit  
Pixel Pitch: 0.264 x 0.264 mm

### Touch Screen

17" resistive or SAW (option)

### SBC

HS-2613

### CPU

VIA V4 Eden processor 1GHz

### System Chipset

VIA CX700(M)

### System Memory

1 x 200-pin SO-DIMM, DDR2 533MHz, Max. 1GB

### Display Interface:

1 x D-SUB 15-pin  
1 x TV-Out port

### Audio Interface

Audio jack for MIC In, Line Out  
2W Amplifier with Stereo Speaker

### Ethernet Interface

2 x RJ-45 for Ethernet  
1 x USB wireless LAN module (option)

### Storage

1 x 2.5" HDD space  
1 x slim CD-ROM space  
1 x Type II CF socket

### Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

### H/W Status Monitor

Monitoring temperatures, voltages status

### Power

12V 60W DC adapter  
+10V~30V DC IN

### Operating/Storage Temperature

0~45°C/-20~+70°C

### Certification

FCC/CE Class A compliance  
IP65 front panel protection compliance


### Dimensions

45.0(L) x 37.0(H) x 6.1(W) cm


### Cut Out Size

40.4(L) x 32.4(H) cm

## I/O Interface

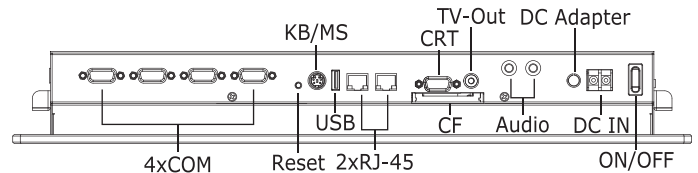

## Dimensions (unit:cm)

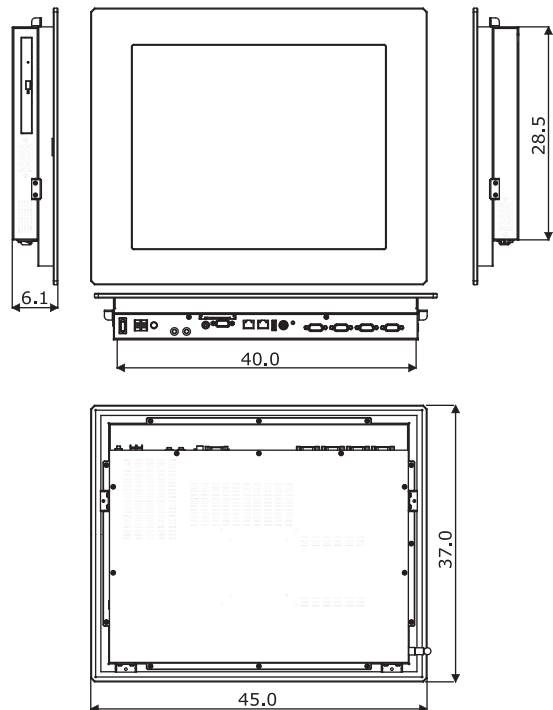

## Ordering Information

### BPF-3217-Y

17" Panel PC w/Resistive Touch Screen, Eden 1GHz CPU, 2W Stereo Speaker, TV-Out, 4 COM, 1 USB, 12V DC Adapter

### Accessory Options

Table Top Metal Stand, SAW Touch Screen, Memory Module, CF Module, Wireless LAN Module, 2.5" HDD, Slim CD-ROM