


## Features

- Intel® Pentium® 4/ Celeron® / Celeron® D mPGA 478 Socket with 400/533 MHz FSB
- Intel® 82845GV GMCH Chipset
- Two DIMMs up to 2 GB DDR Non ECC Memory
- Intel® Extreme Graphics 1
- Realtek® ALC101 support 2 CH Audio
- Realtek® RTL8100BL 10/100Mbps LAN
- 1 ADD, 3 PCI, 1 CNR
- 2 COM, 6 USB
- Micro ATX Form Factor (9.6" x 9")
- RoHS Compliant

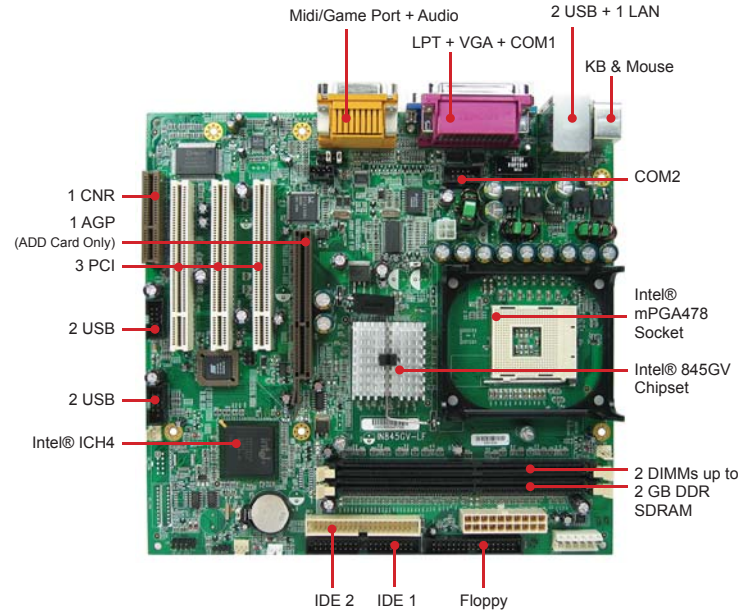

## Specification

### System

CPU	Intel® Pentium® 4/Celeron®/ Celeron® D mPGA 478 Socket with 400/533 MHz FSB
Chipsets	Intel® 82845GV GMCH + Intel® 82801DB ICH4
System Memory	Two 184-pin DIMM support up to 2 GB PC2700 DDR Non ECC
BIOS	Award 4 Mb Flash BIOS
Expansion Interface	1 x ADD Slot
	3 x 32-bit PCI Slots
	1 x CNR Slot
Additional Features	Power Management APM version 1.2
	WOL (Wake On LAN) and WOR (Wake On Ring)

### Display

Chipset	Intel® 82845GV GMCH
Resolution	CRT Mode: Up to 1800 x 1440 @ 85Hz
VGA	1 x DB-15

### I/O

MIO	1 x K/B, 1 x Mouse, 2 x IDE, 1 x LPT, 1 x FDD
USB	2 x USB 2.0 ports (Rear I/O), 4 x USB pin header for 4 USB
COM	1 x RS232 for COM1 (Rear I/O), 1 x RS232 pin header for COM2
IrDA	1 x IrDA Tx/Rx Header

### Audio

AC'97 Codec	Realtek® ALC101support 2 Channel Audio
Audio Interface	Line-out, Line-in, Mic-in and CD Audio-in
Game/Midi Interface	1 x MIDI/Game port

### Ethernet

LAN 1	Realtek® RTL8100BL (100Base-Tx Fast Ethernet)
-------	---

### Mechanical and Environment

Power Supply Voltage	+3.3 V, +5 V, +12 V, +5 VSB, -5 V
Power Type	ATX
Operating Temperature	0° C to 60° C
Storage Temperature	-20° C to 80°
Form Factor	Micro ATX
Dimensions	9.6" (L) x 9" (W)
Weight	1.30 lbs



## Ordering Information

### IN845GV-LF

IN845GV RoHS replacement - Intel® 845GV chipset, 1 10/100 LAN, 1 AGP(ADD card only), 3 PCI, 2 IDE, 2 COM, 6 USB

\* All product specifications are subject to change without notice. Last update: 04/01/2008