




Front View

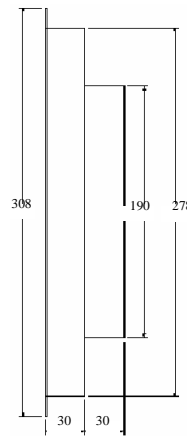

Side View

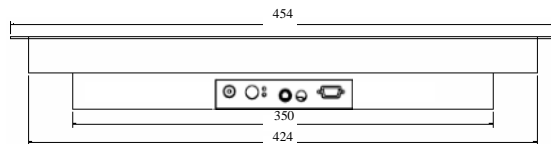

Bottom View

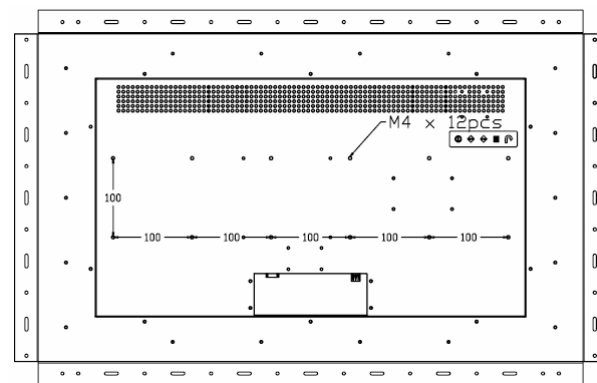

Rear View

LCD Screen

LCD Type	Grade A industrial TFT LCD Panel
Display Size	17.0 inch diagonal (370.56H x 222.34V)
Resolution	1,280 x 768, SXGA
Display Color	16.2M color
Brightness	450 cd/m ²
Contrast Ratio	400: 1 (Typical)
Pixel Pitch	0.2895 x 0.2895 mm
Viewing Angle	70 / 70 / 50 / 60 (L / R / U / D)
OSD Control	Brightness, Contrast, Phase & Clock, Color, H & V position, Auto-tune & Recall
VGA Connector	D-Sub 15 pin VGA analog
Video Input	S-Video and Composite
TV Channel	NTSC, PAL, SECAM
TV Input	RF F-connector
LCD MTBF	50,000 hrs
Mounting	Panel, wall-mount or VESA arm
Dimension	454(W) x 308(H) x 60(D) mm
Weight	4.94 kg (Net) / 10 kg (Gross)
Packing	508(W) x 536(H) x 183(D) mm

External Power Adapter

AC Input	110V ~ 220V AC Input
DC Input	12V@5A Output
AC Cable Length	180cm
DC Cable Length	182cm
Size	108(L) x 64(W) x 30(H) mm
Safety Approval	UL, CE

Environmental

Operating Temperature	0 to 50°C
Storage Temperature	-20 to 60°C
Humidity	95%, non condensing
Shock	50G peak acceleration (11ms, since wave)
Vibration	10~300Hz/1.5G (10min/cycle)
Safety Approval	CE, FCC

Ordering Guide

Model	Description
VTC338795	17" Open Frame Wide-Ranges LCD Panel w/ Video Input
VTC484957	17" OP WR w/ Video Input & TV Tuner